

MODEL SC-36 36 x 36 SHOWER



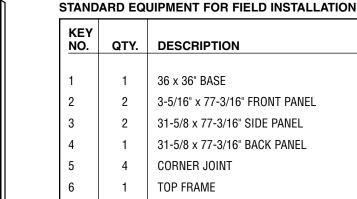


1

1

1

48" 24" (610mm) 82" (610mm) (2083mm)



FOR CORRECT INSTALLATION:

1. ESTABLISH PROPER CLEARANCE BETWEEN SHOWER BASE AND WALLS.

PRESSURE BALANCED VALVE AND HEAD

ROD AND CURTAIN

SOAP DISH

SET SHOWER BASE ON MORTAR BED AND CAREFULLY LEVEL TO AVOID PROBLEMS OF UNEVEN SUB FLOOR.

OPTIONS

- ☐ FILLER STRIP (KEY NO. 7)
- FINISH:
 - ☐ POWDER COAT ON GALVANIZED STEEL
 - ☐ HIGH DENSITY POLYMER (H.D.P.)
 - ☐ STAINLESS STEEL
 - ☐ SOLID PHENOLIC CORE (S.P.C.)
- ☐ THERMOSTATIC VALVE
- ☐ TOP COVER
- ☐ TOP COVER WITH LIGHT
- ☐ VALVE BY OTHERS
- ☐ COLOR:
 - ☐ WHITE
 - OPTIONAL

Note: All dimensions subject to manufacturing variance of plus or minus 1/4" (6 MM).