

OUTDOOR SHOWER SPECIFICATIONS

MODEL: 6200-MWL

TYPE: Body and foot shower.

PEDESTAL: 6-5/8" diameter steel pipe with 1/8" wall.

HEAD: Two (2) chrome plated brass. Vandal proof design with no exposed fasteners, non-removable spray heads, 2.5 gpm flow rate, adjustable spray pattern with 1/8" allen wrench inserted through spray head orifice.

VALVE: Two (2) chrome plated brass push button assemblies recessed in 1/2" steel plate. Pneumatically operated metering type. Metering cycle is adjustable from 5 seconds to 2 minutes.

MOUNTING: Wall (Four 9/16" holes in exterior plates) and surface (Two holes in base plate for 1/2" bolts).


SUPPLY: 1/2" reinforced vinyl tubing with 1/2" IPS hook-up and stainless steel fittings.

FINISH: Polyester powder coat.

COLOR: Blue. Optional colors: red, green, dark bronze, black, silver, sand, yellow, orange and white.

OPTIONS: -32 1/2" compression type with standard hose connection and vacuum breaker
-32-LK same as above with loose key
-85 valve box
-SS stainless steel pipe

MODEL 6200-MWL
 Shower/Foot Spray Station
 Mounting: Exterior Wall

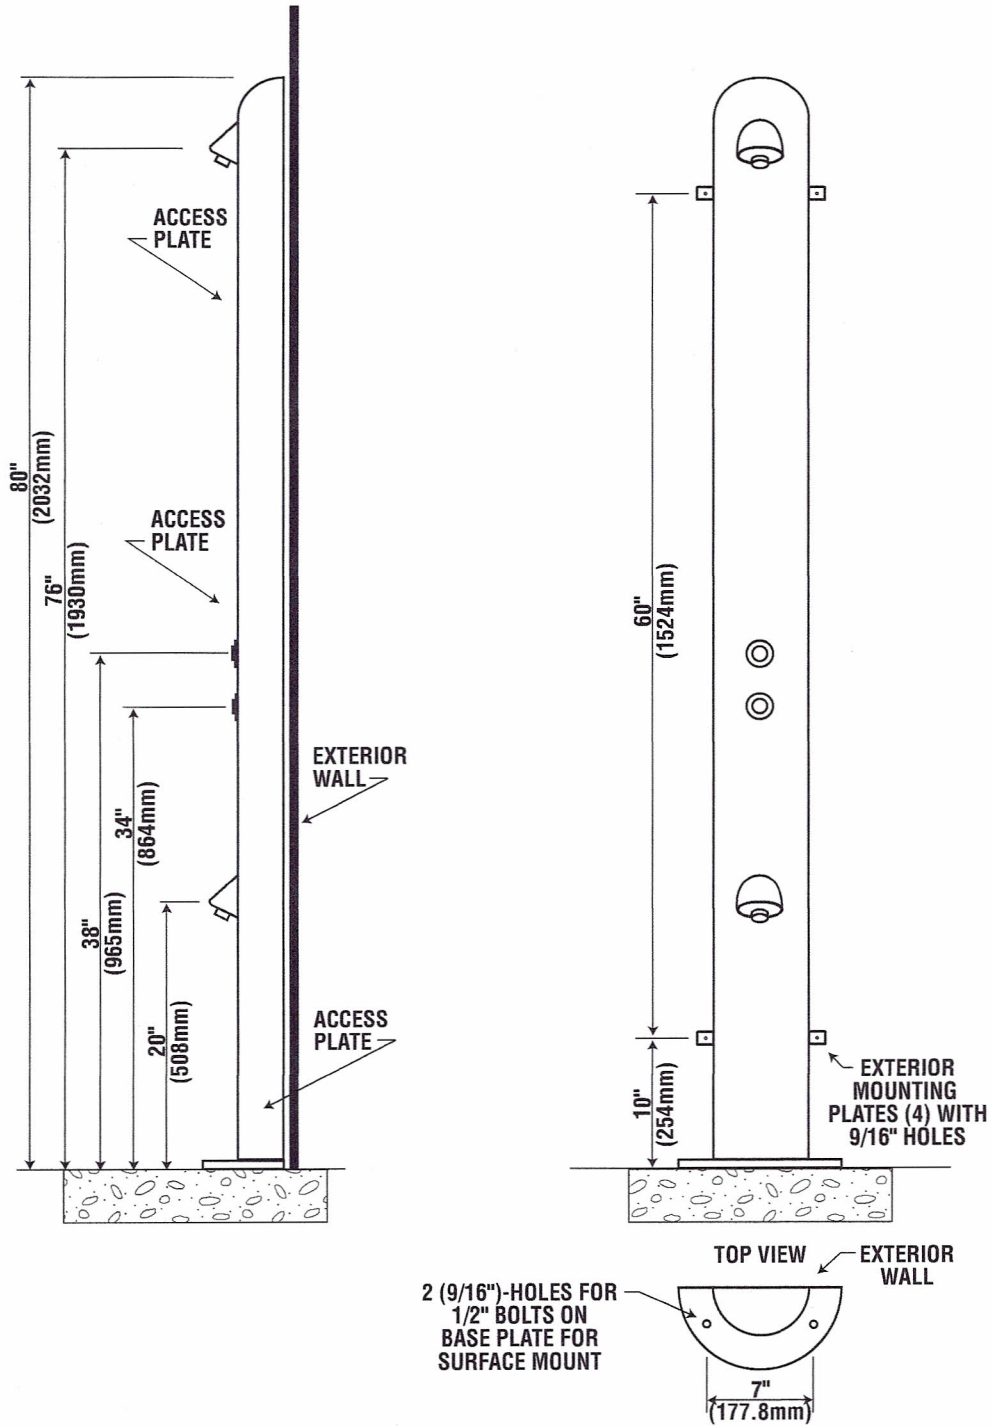

NOTE: THESE ROUGH-IN DIMENSIONS
 MAY VARY 1/2" (13 mm) PLUS OR MINUS

Note: All dimensions subject to manufacturing variance of plus or minus 1/4" (6 MM).