SHOWER FLOOR
Model No. ( ) Size ( )
— For off-the-floor roughing —

Shower Floor shall be of Williams precast terrazzo. Terrazzo shall be made of black and white marble chips cast in white Portland cement to produce a compressive strength of not less than 3000 PSI, seven days after casting. Terrazzo surface shall be ground smooth, grouted and sealed to resist stain. Flange cast integral shall be of galvanized-bonderized steel and shall extend not less than one inch above the shoulder. Drain body shall be cast integral and shall provide for a 2" female I.P.S outlet. Removable type strainer plate shall be made of C.P. brass.

STERN
WILLIAMS

BACK OUTLET
SHOWER FLOORS
ARCHITECTURAL SPECIFICATIONS

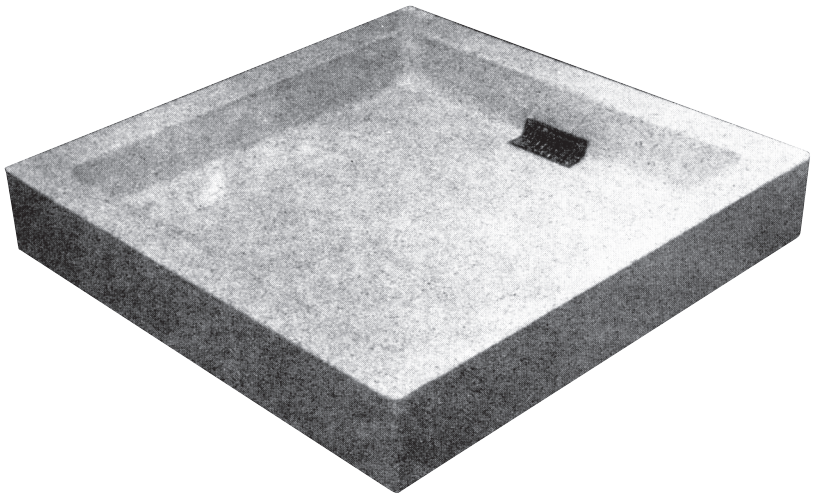

SERPENTINE BACK OUTLET SHOWER FLOORS*

MODEL	SIZE
34-BO	36”x36"x6”

{ Flanged and/or rabbet }

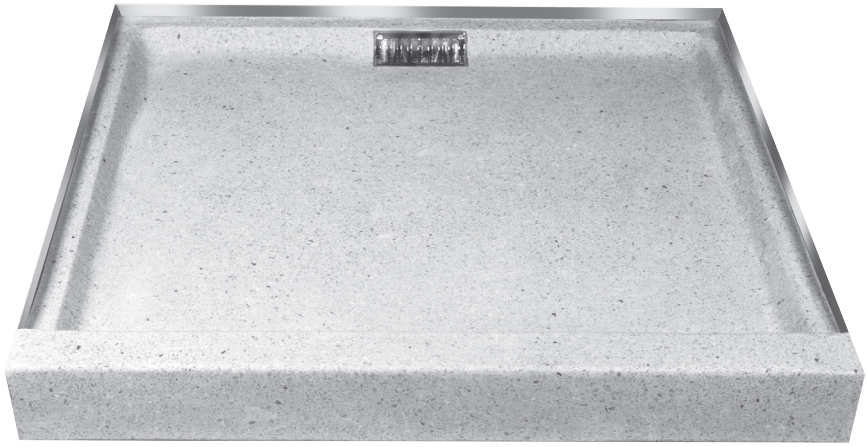

SERPENTINE BACK OUTLET SHOWER FLOORS*

MODEL	SIZE
52-BO	32”x32"x4”
54-BO	36”x36"x4”

JOB **ENGINEER**

LOCATION **CONTRACTOR**

Serpentine

BACK OUTLET SHOWER FLOORS
For off-the floor roughing

{ Flanged and/or rabbet }

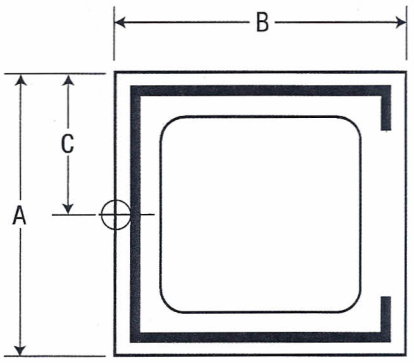

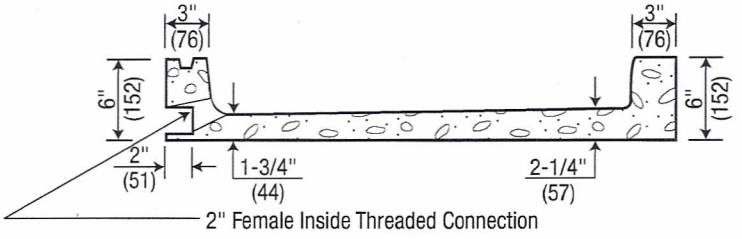

MODEL	SIZE		A		B		C	
	Inches	MM	Inches	MM	Inches	MM	Inches	MM
34-BO	36x36	915x915	36	915	36	915	18	457

Specifications: Model No. ( ) Size ( ) as manufactured by Stern-Williams, Inc. Terrazzo shall be of black and white marble chips cast in white Portland cement to produce a compressive strength of not less than 3000 PSI seven days after casting. Terrazzo surface shall be ground smooth, grouted and sealed to resist stain. Drain shall be brass with a removable chrome-plated brass strainer, and shall provide for a 2" Female I.P.T. outlet.

Trieste

BACK OUTLET SHOWER FLOORS — With Threshold
For off-the floor roughing

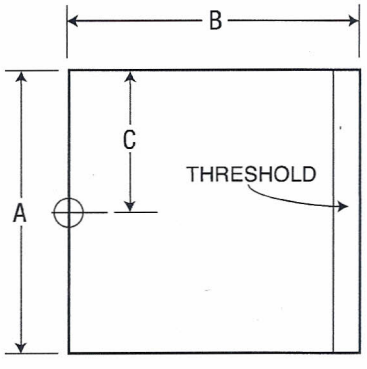

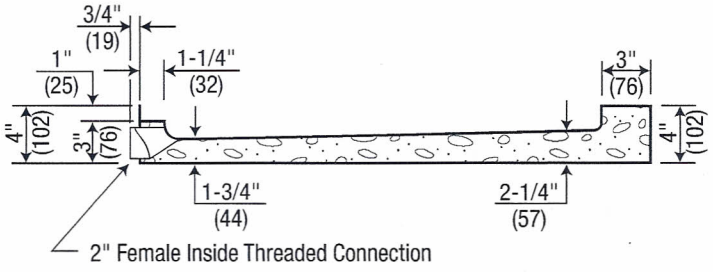

MODEL	SIZE		A		B		C	
	Inches	MM	Inches	MM	Inches	MM	Inches	MM
52-BO	32x32	813x813	32	813	32	813	16	406
54-BO	36x36	915x915	36	915	36	915	18	457

Note: All dimensions subject to manufacturing variance of plus or minus 1/4" (6 MM).

STERN-WILLIAMS CO., INC. • P.O. Box 8004 • Shawnee Mission, Kansas 66208 USA
Telephone: (913) 362-5635 • Fax: (913) 362-6689 • Web address: www.sternwilliams.com