


STERN

**WILLIAMS** DIMENSIONAL INFORMATION

**NO LEAD ELECTRIC  
WATER CHILLER  
MODEL: WC-8**

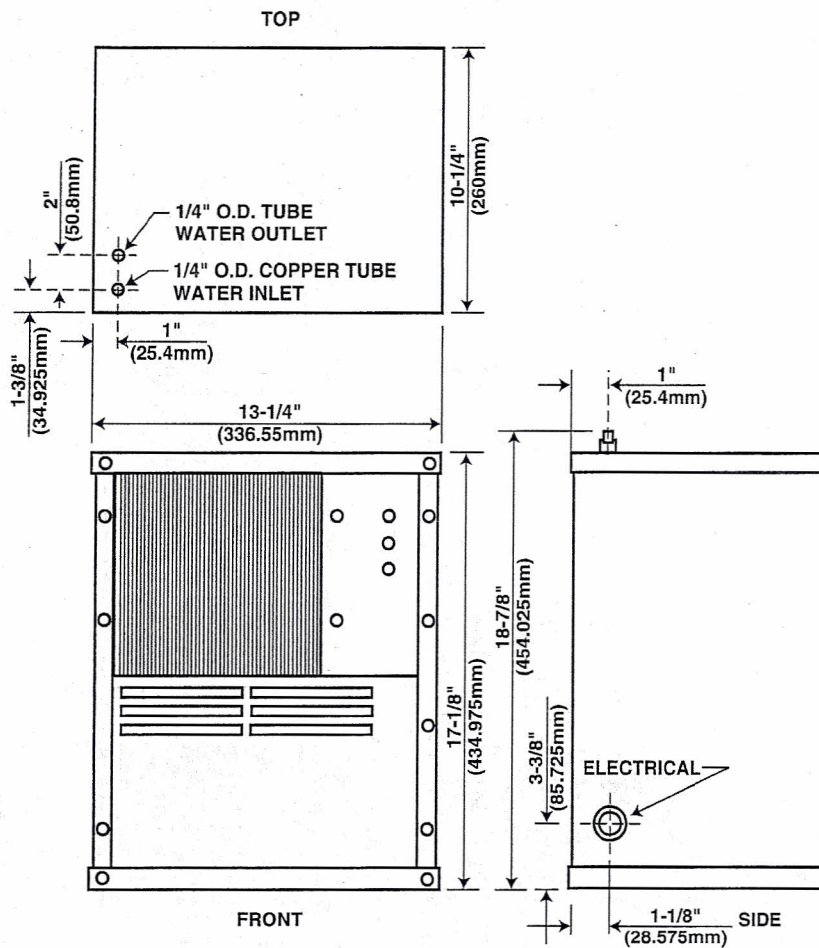

Model Number	Capacity	Amps	H.P.	Shpg. Wt. Lbs.
WC-8	8.0*	5.0	1/5	47

\*Rated capacity, GPH of 50°F. drinking water, based upon 80°F. inlet water and 90°F. ambient room temperature.

**CABINET**

Heavy gauge galvanized steel.

**COOLING UNIT**

Tube-on-tube self-cleansing design with refrigerant tubing bonded to the outside of a continuous coil of seamless copper tubing carrying the water.

**REFRIGERATION SYSTEM**

Hermetically sealed with reciprocating compressor. Capillary tube controlled. Lifetime lubrication.

HFC Refrigerant R-134a

**CONDENSER/FAN**

Fan cooled, copper tube with aluminum fins. Permanently lubricated fan motor.

**THERMOSTAT**

Factory set to supply water at 50°F. Can be adjusted ±5°F.

**ELECTRICAL CONNECTIONS**

Internal junction box with 7/8" hole for rigid or flexible conduit installation.

Standard: 115V, 60Hz single phase  
Optional: 220V, 50Hz single phase

**INSTALLATION**

Air cooled remote chillers require air circulation for proper operation. Any chiller mounted under a counter must also have adequate ventilation. Louvered grills available as extra cost options

**NOTE:**

It is recommended that all water outlets be not more than 15 feet from the chiller and all cold water piping be covered with sponge rubber or ice water type insulation of adequate thickness.

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE