

MODEL 6800, 6815, 6825 & 6835 WHEELCHAIR ACCESSIBLE SHOWER TOWERS

Our wheelchair accessible outdoor showers are great for beaches, pools, water parks, volleyball courts and any other recreation areas. Models 6825 and 6835 are ADA compliant and come with 2 grab bars.

Three chrome plated brass shower heads. Vandal proof design with no exposed fasteners, non removable spray heads with adjustable spray patterns using a 1/8" allen wrench inserted through spray head orifice.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- All exposed parts are recessed in welded steel plates
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life
- 1/2" reinforced vinyl tubing with 1/2" IPS hook-ups and stainless steel supply fittings connected to reinforced tubing
- Water pressure range of 30-80 PSI
- Simple flow adjustment without dismantling of the shower tower with a water flow of 2.5 GPM
- Timer controlled shower heads are made from heavy duty materials with a preset running time of 60 seconds that can be adjusted from 0 to 60 seconds
- Shower head spray pattern is adjustable from stream to mist
- In-line mesh screen Y strainer
- 1/2" Inlet stop valve for simple future maintenance
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable



(Shown above) Model 6825



ORDERING OPTIONS

Part Number

6800-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

6815-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

6825-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

6835-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key

- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve

- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

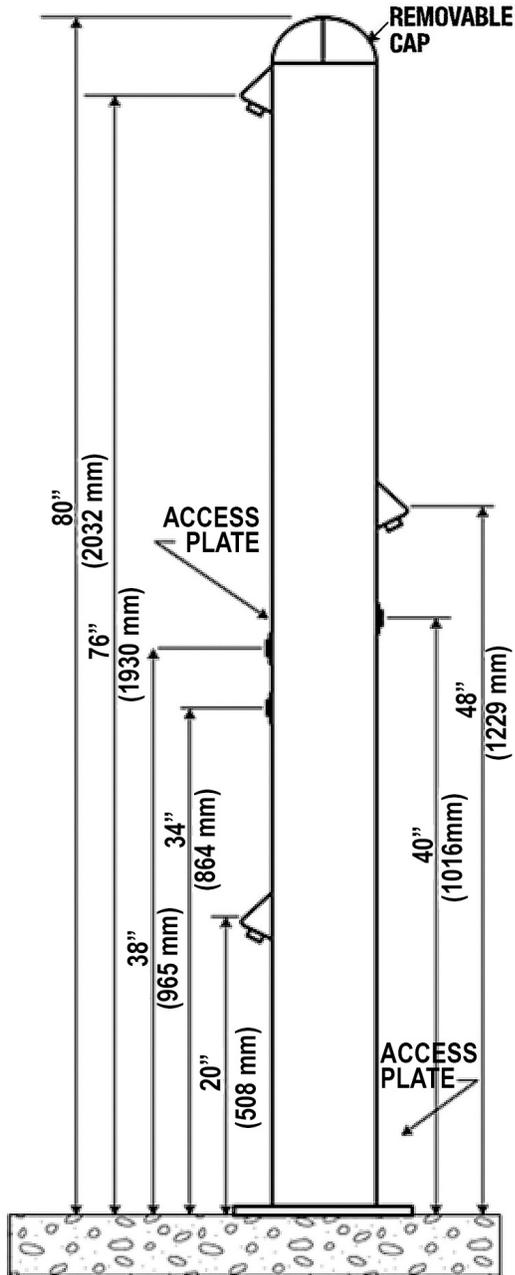
DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

- 6800** 80"H x 6 5/8"Dia – Side access
- 6815** 80"H x 6 5/8"Dia – Front access
- 6825** 80"H x 6 5/8"Dia – Side access with grab bar
- 6835** 80"H x 6 5/8"Dia – Front access with grab bar

SPEC


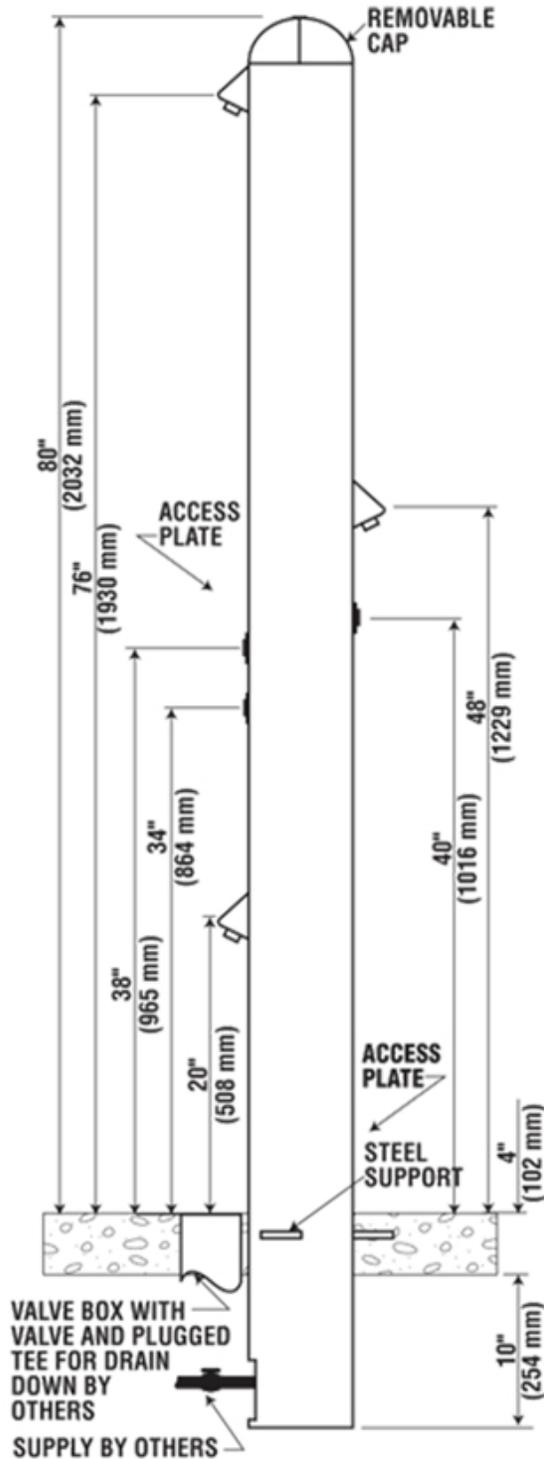
Furnish and install the Stern-Williams Wheelchair Accessible Shower Towers (specify model color). Shower towers shall be carbon steel or 304 stainless steel and a powder coated finish. Shower heads shall be lead free chrome plated brass with a water pressure range of 30-80 PSI. Shower heads shall include adjustable spray patterns and adjustable timing of 0-60 seconds. Shower towers shall provide simple flow adjustment without requiring dismantling of shower with a water flow of 2.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Shower towers shall be installed per manufacturers recommendations and instructions. Made in the USA.

6800


NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA.

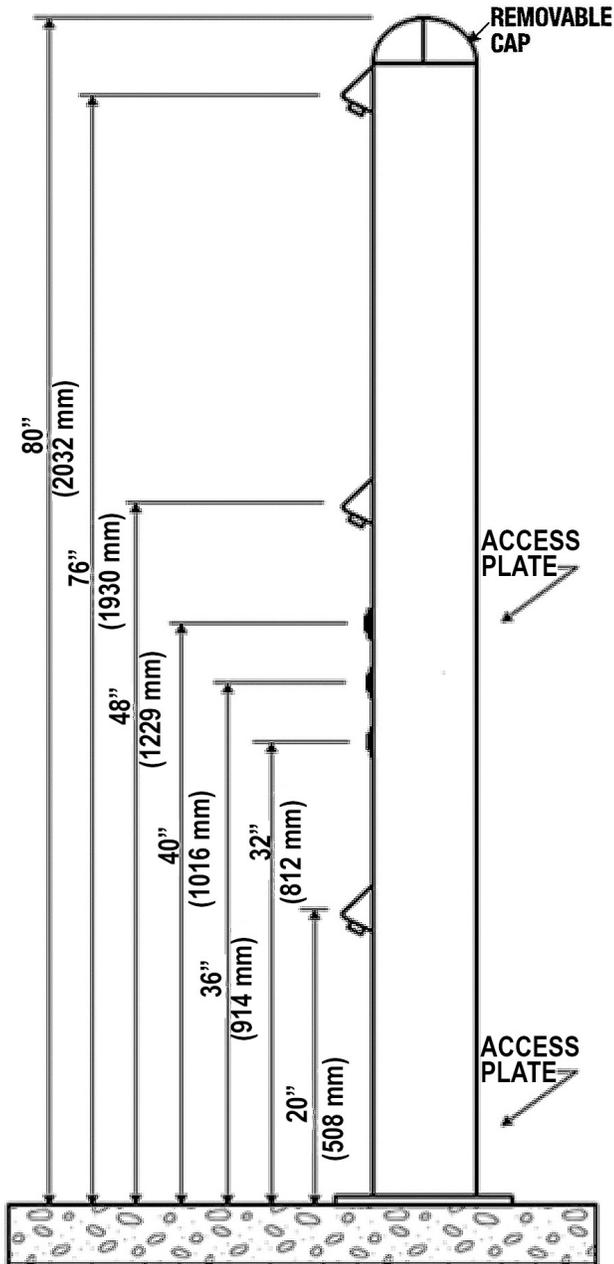
@ 90°

12" DIA. PLATE


6900



VALVE BOX WITH VALVE AND PLUGGED TEE FOR DRAIN DOWN BY OTHERS
SUPPLY BY OTHERS

6815

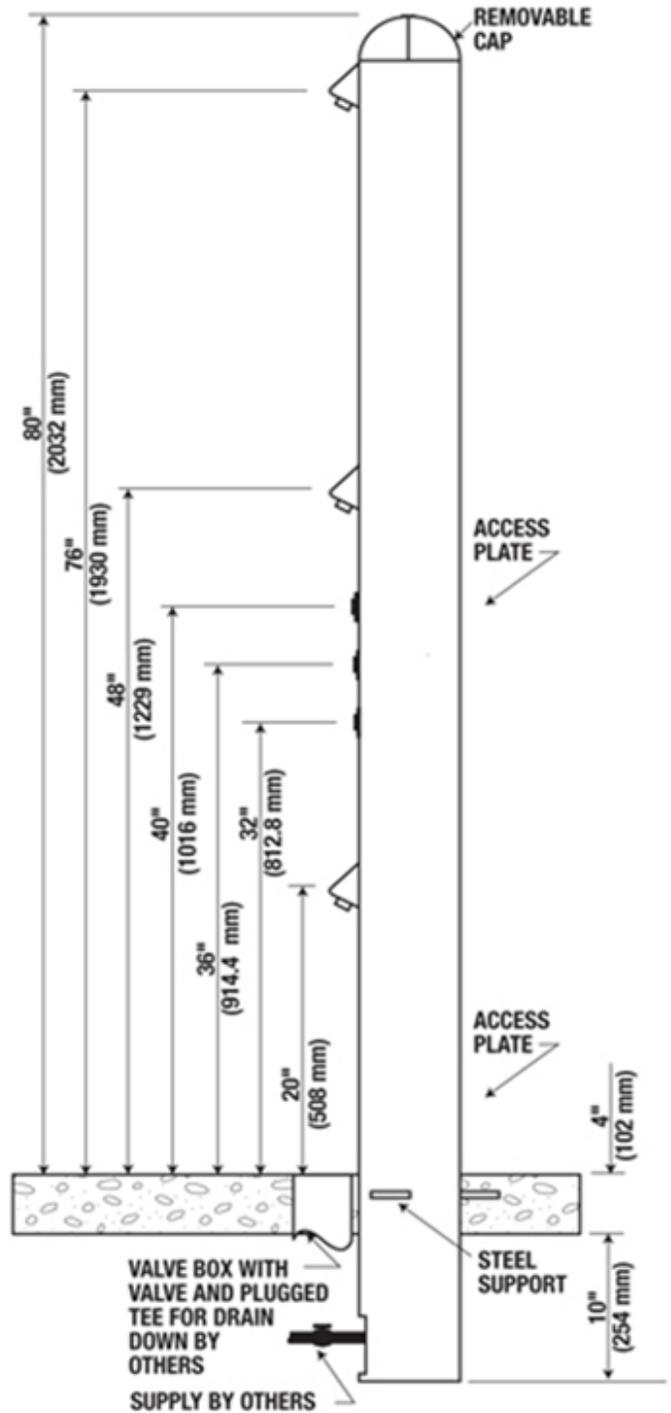


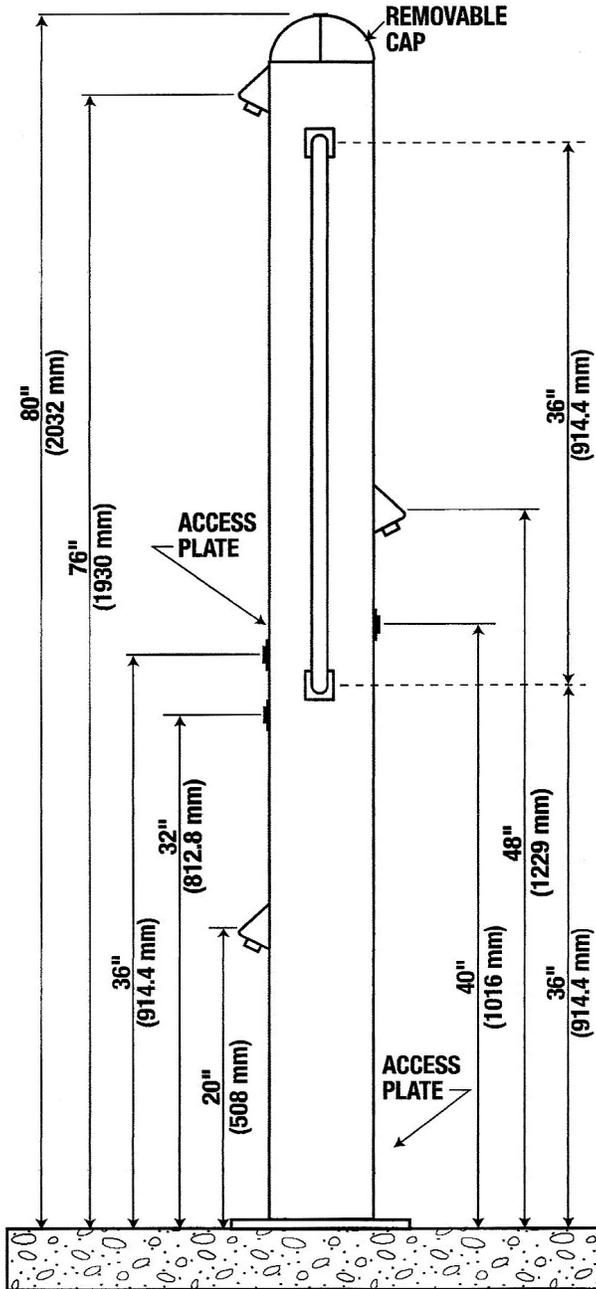
NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA. @ 90°

12" DIA. PLATE


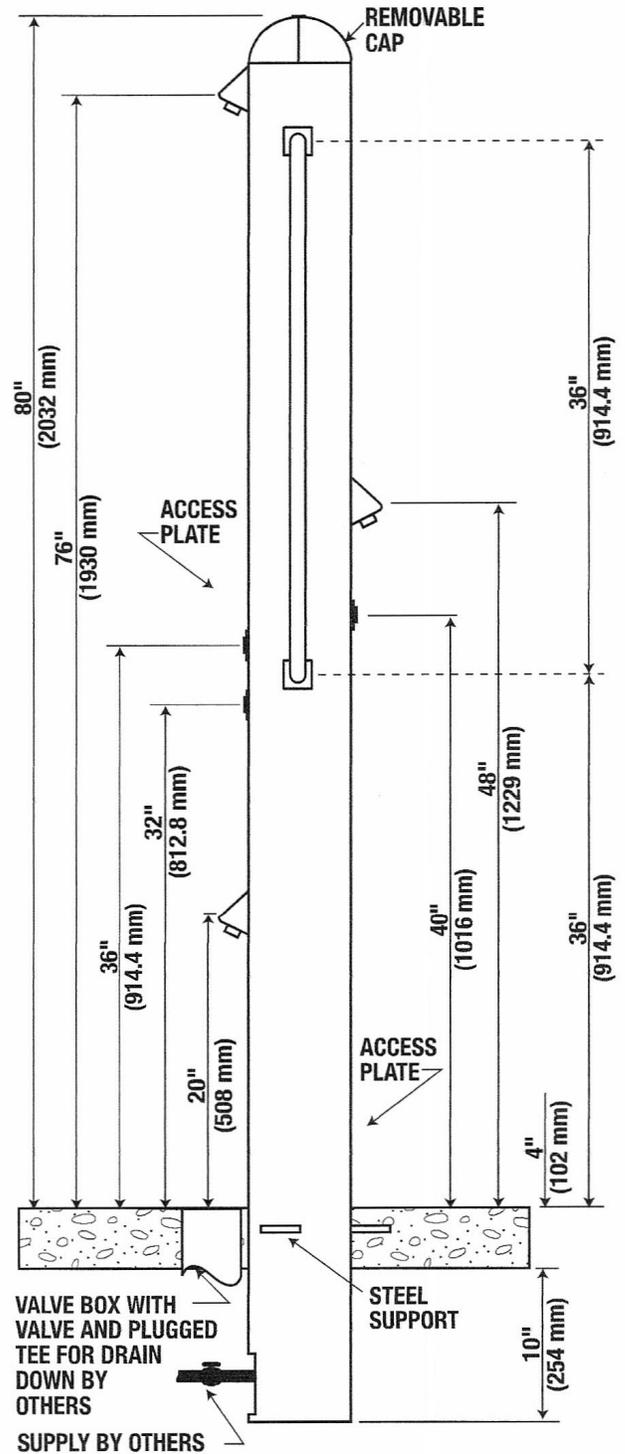


6915

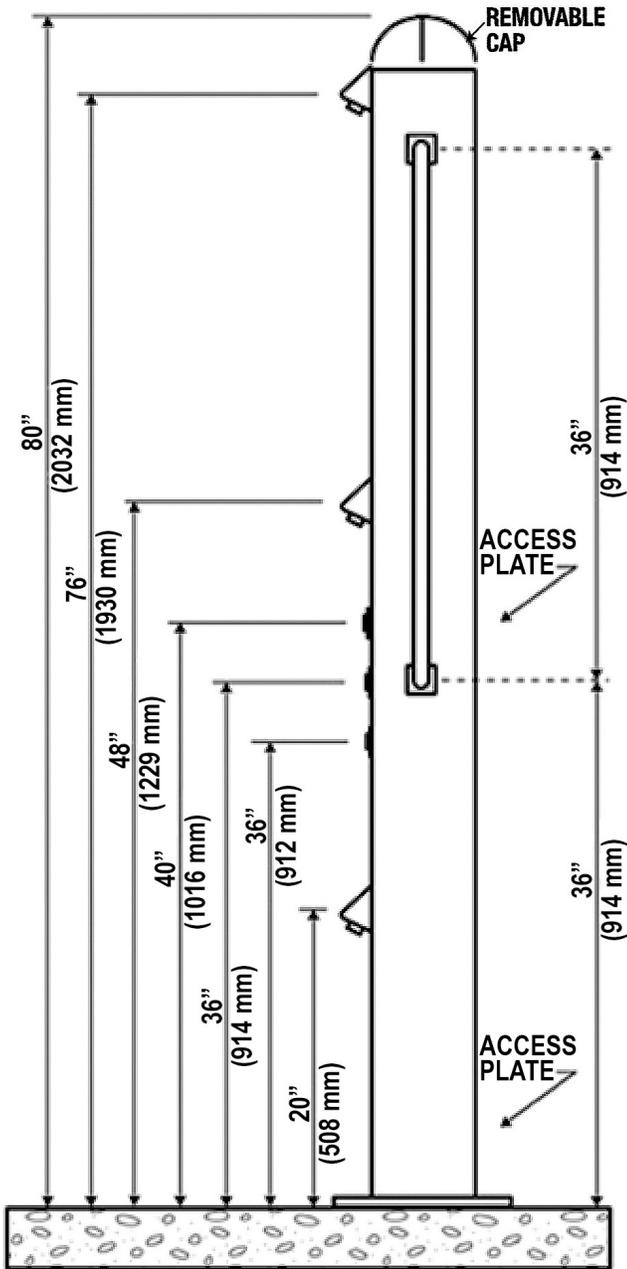


6825


NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA. @ 90°
 12" DIA. PLATE



6925


6835



NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA. @ 90°

12" DIA. PLATE



6935

