

## WDA-3600, WDA-3610, WDA-3620 PARIAN TRANSFER TYPE SHOWER FLOOR

Terrazzo's natural non-slip surface provides better footing and increased safety. Wheelchair shower floors are flanged on three sides for a water tight joint between the wall and shower floor. These shower floors must be set on a level grout or mortar bed.

The intent is to allow a wheelchair patient to lift one's self onto a transfer seat with the assistance of a grab bar. This transfer type shower floor has an integral cast 12" ramp with a running slope of 1:12. A stainless steel cap covers and protects the leading 6" of the ramp. A floor drain by others at the entrance to the sloped threshold and a collapsible water dam.



### FEATURES

- Flanges are intended to be used with wall tile applied by others to conform with Federal, state and local shower stall dimensions
- A floor drain by others at the entrance to the sloped threshold and a collapsible water dam (Option: -RDM) are recommended for added protection
- This unit must be recessed into the building floor to allow unobstructed entry

### ORDERING OPTIONS

Part Number

**WDA-**



**Size**

- 3600:** 39×39"
- 3610:** 60×30"
- 3620:** 60×36"

**Options**


- RDM:** Collapsible Water Dam
- LF:** Less flanges

(Shown above) Model WDA-3610

## DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

MODEL	FLANGES	RAMP	SIZE	A	B	C	D	E	F
WDA-3600	3 sides	1 side	39x39	39	39	19 ½	19 ½	—	—
WDA-3610	3 sides	1 side	60x30	60	30	15	30	—	—
WDA-3620	3 sides	1 side	60x36	60	36	18	30	—	—

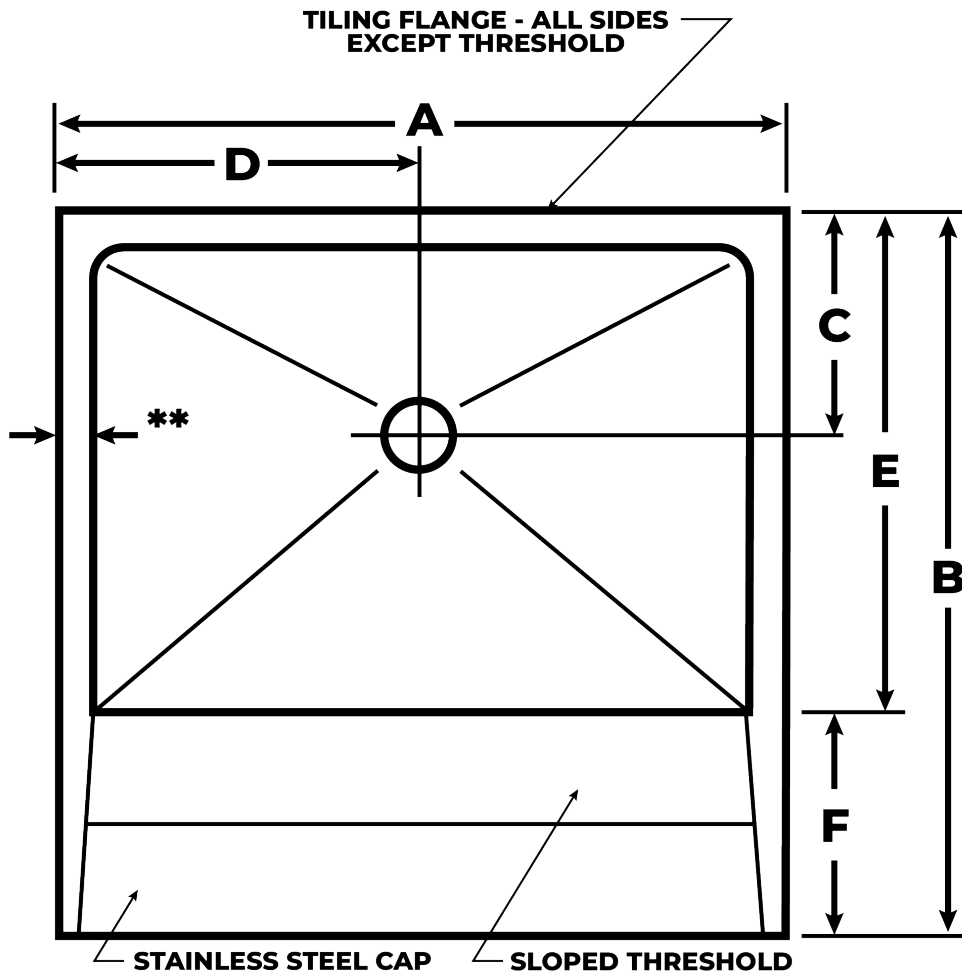

### PLAN

"WDA" SERIES W/ 1/2" CURB\*\*