

WDA-3600, WDA-3610, WDA-3620 PARIAN TRANSFER TYPE SHOWER FLOOR

Wheelchair shower floors are flanged on three sides for a water tight joint between the wall and shower floor. Tiling flanges are intended to be used with wall tile applied by others to conform with Federal, state and local shower stall dimensions.

The intent is to allow a wheelchair patient to lift one's self onto a transfer seat with the assistance of a grab bar. This shower floor comes with an integral cast 12" ramp with a 6" stainless steel entry cap.



(Shown above) Model WDA-3610

FEATURES

- Terrazzo is cast in white Portland cement with a composition of black and white quartz, marble and other materials, then ground smooth, grouted and sealed to resist stains and moisture which produces a compressive strength of 3000 PSI seven days after casting.
- Drain shall be stainless steel cast integral with removable stainless steel strainer, and sized for a gasket (QDC4000 included for 2" XHCI, plastic or steel pipe) or a caulked lead connection not less than 1" deep to a 3" pipe.
- Terrazzo's natural non-slip surface provides better footing and increased safety.
- Custom configurations available – Drain positions, overall size, tiling flanges, color options. Call for more information and pricing.

OPTIONAL COMPONENTS

- RDM:** Collapsible Water Dam
- PB:** Polished Brass Strainer
- VP:** Vandal Proof Drain

ORDERING OPTIONS

Part Number

WDA-

Size


- 3600:** 39×39"
- 3610:** 60×30"
- 3620:** 60×36"

DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm).


Recommended that a floor drain at or near the entrance be included.

MODEL	FLANGES	RAMP	SIZE	A	B	C	D	E	F
WDA-3600	3 sides	1 side	39x39	39	39	12	20	26	12
WDA-3610	3 sides	1 side	60x30	60	30	12	30	18	12
WDA-3620	3 sides	1 side	60x36	60	36	12	30	24	12

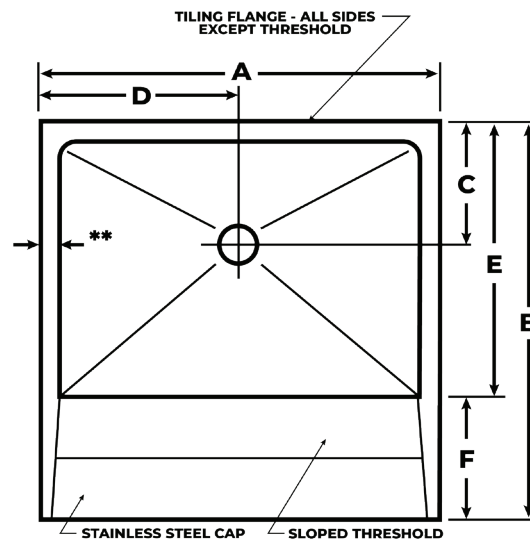

PLAN

"WDA" SERIES W/ 1/4" CURB**

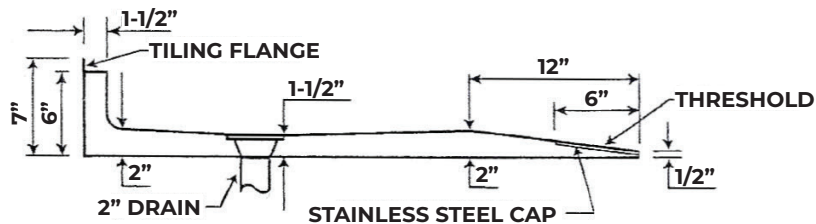

SECTION THRU SHOWER FLOOR

SPECS

Furnish and install Parian Transfer Type shower floor with a wheelchair accessible ramp and a 6" stainless steel cap on threshold manufactured by Stern-Williams using black and white chips cast in white Portland cement. The terrazzo material shall have a compressive strength not less than 3000 PSI after full cure. All exposed terrazzo surfaces shall be ground smooth, grouted, and factory sealed to resist stains and moisture. Tiling flanges, cast integral shall be of stainless steel and shall not extend not less than one inch above the shoulder. Shower floors include a stainless steel drain body that is cast integral to the shower floor with a removable type stainless steel strainer. Drain shall have inside connection to a 2" pipe sealed with factory provided gasket. Shall be made in the USA.