

WDA-3605, WDA-3630, WDA-3660 PENTELIC TRANSFER TYPE SHOWER FLOORS

Pentelic Transfer Type Shower Floor with Ramp. Wheelchair shower floors are flanged on three sides for a water tight joint between the wall and shower floor. Tiling flanges are intended to be used with wall tile applied by others to conform with Federal, state and local shower stall dimensions.



The intent is to allow a wheelchair patient to lift one's self onto a transfer seat with the assistance of a grab bar. This shower floor comes with an integral cast 12" ramp with a 6" stainless steel entry cap. A floor drain by others at the entrance to the sloped threshold and a collapsible water dam (Option: -RDM) are recommended for added protection.

(Shown above) Model WDA-3605

FEATURES

- Terrazzo is cast in white Portland cement with a composition of black and white quartz, marble and other materials, then ground smooth, grouted and sealed to resist stains and moisture which produces a compressive strength of 3000 PSI seven days after casting.
- Integral cast 2" bottom outlet brass drain under the grate
- Shower floor must be set on level grout or mortar bed – See instructions for details.
- Terrazzo's natural non-slip surface provides better footing and increased safety.
- Custom configurations available – Drain positions, overall size, tiling flanges and color options. Call for more information and pricing.

OPTIONAL COMPONENTS

- RDM:** Collapsible Water Dam
- PB:** Polished Brass Strainer
- VP:** Vandal Proof Drain
- TC-2:** 2" Drain Gasket for a 2" pipe - Brass drains only
- QDC4000:** 2" Drain Gasket for a 2" pipe - Stainless steel drains only

ORDERING OPTIONS

Part Number

WDA-



Size


- 3605:** 40x38"
- 3630:** 64x32"
- 3660:** 64x38"

DIMENSIONS


All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm).

Recommend that a floor drain at or near the entrance be included.

MODEL	FLANGES	RAMP	SIZE	A	B	C	D	E	F
WDA-3605	3 sides	1 side	40x38	40	38	12	19 1/2	27	12
WDA-3630	3 sides	1 side	64x32	64	32	12	32	20	12
WDA-3660	3 sides	1 side	64x38	64	38	12	32	26	12

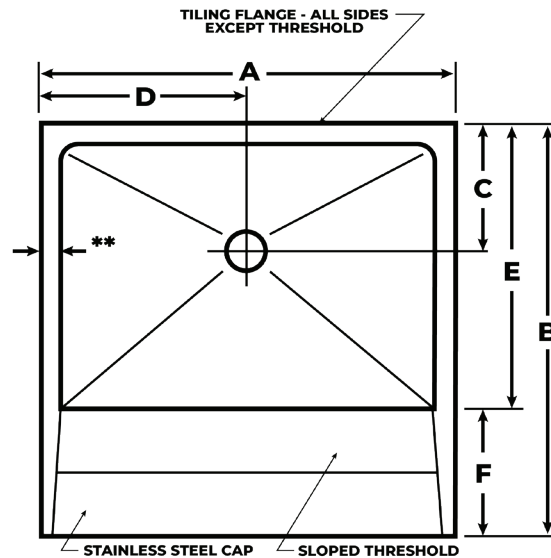

PLAN
"WS" SERIES W/ 3" CURB**

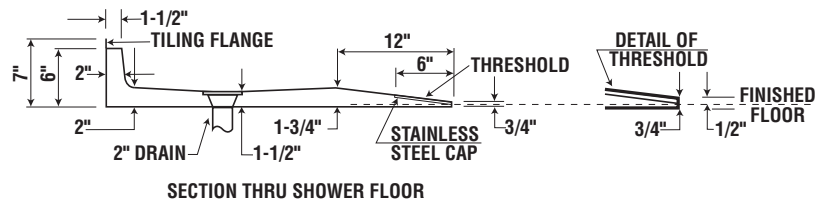

SECTION THRU SHOWER FLOOR

SPECS

Furnish and install Pentelic Transfer Type shower floor with a wheelchair accessible ramp and a 6" stainless steel cap on threshold. Manufactured by Stern-Williams using black and white chips cast in white Portland cement. The terrazzo material shall have a compressive strength not less than 3000 PSI after full cure. All exposed terrazzo surfaces shall be ground smooth, grouted, and factory sealed to resist stains and moisture. Tiling flanges, cast integral shall be of stainless steel and shall not extend not less than one inch above the shoulder. Shower floors include a brass drain body that is cast integral to the shower floor with a removable type stainless steel strainer. Drain shall provide for a gasket or caulked lead connection not less than one inch deep to a two inch pipe. Select models conform to ADA standards. Shall be made in the USA.