

MODEL 6000 & 6000-MWL OUTDOOR FOOT SHOWERS

Metal Pedestal Outdoor Foot Showers are an excellent choice for resorts, playgrounds, volleyball courts and any other recreational area. Surface type with mounting plate welded to pedestal.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- All exposed parts are recessed in welded steel plates
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life
- Stainless steel supply fittings connected to reinforced tubing
- Water pressure range of 30-80 PSI
- Simple flow adjustment without dismantling of the shower with a water flow of 2.5 GPM
- Timer controlled foot showers are made from heavy duty materials with a preset running time of 60 seconds that can be adjusted from 0 to 60 seconds
- Foot shower spray pattern is adjustable from stream to mist
- All flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards
- ½" inlet stop valve for simple future maintenance
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable



ORDERING OPTIONS

Part Number


6000-



Optional

- SS:** Stainless Steel Body Upgrade
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 90:** Pet Fountain
- 96:** Sand Trap
- SMP-6:** Surface Mounting Plate

6000-MWL-



Optional

- SS:** Stainless Steel Body Upgrade
- 40:** Commemorative Plaque

DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

6000 32"H x 6-5/8"W - Surface mount


6100 46"H x 6-5/8"W - In Ground Bury

6000-MWL 8"H x 8"W - Wall mount

SPEC


Furnish and install the Stern-Williams Foot Wash Showers (specify model color). Foot showers shall be carbon steel or 304 stainless steel and a powder coated finish. Foot shower heads shall be chrome plated brass with a water pressure range of 30-80 PSI. Foot showers shall include adjustable spray patterns and adjustable timing of 0-60 seconds. Foot showers shall provide simple flow adjustment without requiring dismantling of shower with a water flow of 2.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Foot showers shall be installed per manufacturers recommendations and instructions. Foot showers flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards. Made in the USA.

6000

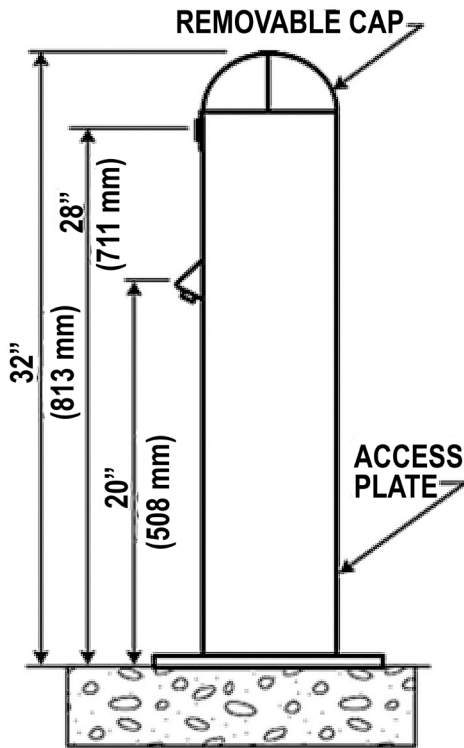


NOTE: FOUR 9/16" O.D. MOUNTING BOLTS SPACED ON 10" DIA. @90°

12" DIA. PLATE



6100

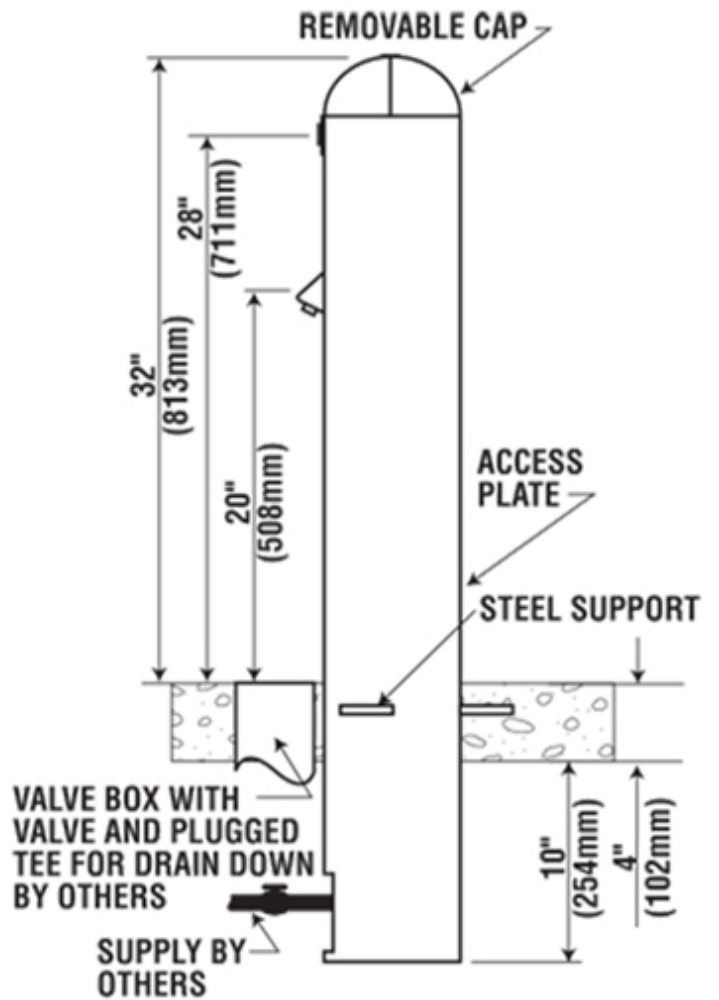

6000-MWL

