



## MODEL 6400 & 6500 DUAL OUTDOOR SHOWER AND FOOT SPRAY

One of our best complete line of outdoor showers with body sprays. Models are versatile and great for resorts, playgrounds, and recreational outdoor areas. These outdoor showers are designed to comply to the roughest conditions.

Model includes four chrome plated brass shower heads. Vandal proof design with no exposed fasteners, non removable spray heads with an adjustable spray pattern with an 1/8" allen wrench inserted through spray head orifice.

### FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- All exposed parts are recessed in welded steel plates
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life
- ½"reinforced vinyl tubing with ½" IPS hook-ups and stainless steel supply fittings connected to reinforced tubing
- Water pressure range of 30-80 PSI
- Simple flow adjustment without dismantling of the fountain with a water flow of 2.5 GPM
- Timer controlled shower heads are made from heavy duty materials with a preset running time of 60 seconds that can be adjusted from 0 to 60 seconds
- Shower head spray pattern is adjustable from stream to mist
- g½" inlet stop valve for simple future maintenance
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable





## ORDERING OPTIONS

Part Number

**6400-**



### Optional

- ☐ **SS:** Stainless Steel Body Upgrade
- ☐ **31:** Chrome Plated Jug Filler
- ☐ **32:** RCP Hose Bibb with VB
- ☐ **32-LK:** RCP Hose Bibb with VB and Key
- ☐ **32-SC:** Self Closing Hose Bibb with VB
- ☐ **32-VP:** Recessed Vandal Proof Valve
- ☐ **35:** Recessed Compression Type
- ☐ **35-VP:** Recessed Hose Bibb with Lock
- ☐ **38:** Shutdown/Drain Valve
- ☐ **40:** Commemorative Plaque
- ☐ **85:** Valve Box
- ☐ **100:** Solar Light
- ☐ **SMP-6:** Surface Mounting Plate

Part Number

**6500-**



### Optional

- ☐ **SS:** Stainless Steel Body Upgrade
- ☐ **31:** Chrome Plated Jug Filler
- ☐ **32:** RCP Hose Bibb with VB
- ☐ **32-LK:** RCP Hose Bibb with VB and Key
- ☐ **32-SC:** Self Closing Hose Bibb with VB
- ☐ **32-VP:** Recessed Vandal Proof Valve
- ☐ **35:** Recessed Compression Type
- ☐ **35-VP:** Recessed Hose Bibb with Lock
- ☐ **38:** Shutdown/Drain Valve
- ☐ **40:** Commemorative Plaque
- ☐ **85:** Valve Box
- ☐ **100:** Solar Light
- ☐ **SMP-6:** Surface Mounting Plate

## DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)


**6400** 80"H x 6-5/8"Dia. - Surface mount

**6500** 94"H x 6-5/8"Dia. - In ground bury

## SPEC


Furnish and install the Stern-Williams Dual Outdoor Body and Foot Shower (specify model color). Shower towers shall be carbon steel or 304 stainless steel and a powder coated finish. Shower heads shall be chrome plated brass with a water pressure range of 30-80 PSI. Shower heads shall include adjustable spray patterns and adjustable timing of 0-60 seconds. Shower towers shall provide simple flow adjustment without requiring dismantling of shower with a water flow of 2.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Shower towers shall be installed per manufacturers recommendations and instructions. Made in the USA.

## 6400

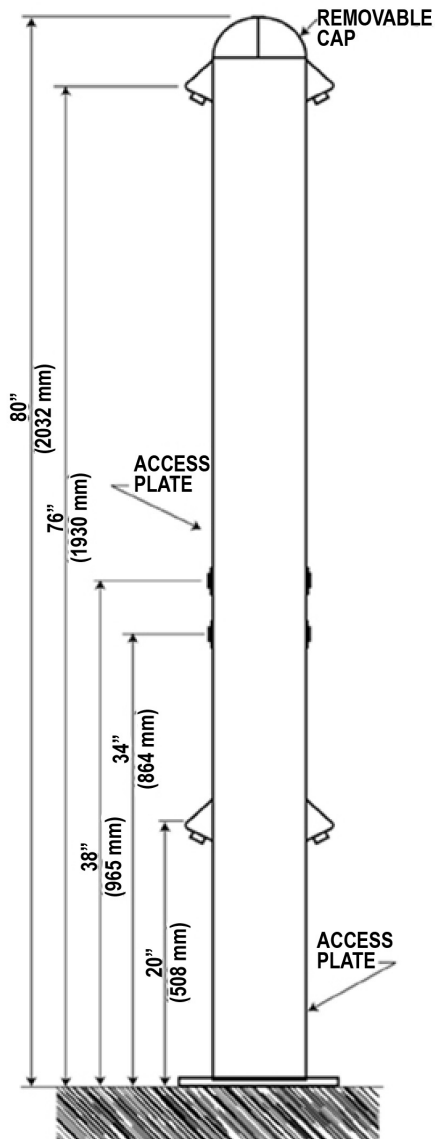

NOTE: FOUR 9/16" O.D.  
MOUNTING BOLTS  
SPACED ON  
10" DIA. @90°

12" DIA. PLATE



## 6500

