

MODEL 6425 & 6450 COMFORT SPRAY STATIONS

This Comfort Spray Station was designed for maximum cool down after rigorous outdoor activity. Model 6425 has 10 vandal resistant mist heads and model 6450 has 8 vandal resistant mist heads. Metering valve is standard.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance.
- All exposed parts are recessed in welded steel plates.
- Stainless Steel (-SS) bodies available for harsh coastal environments.
- Vandal resistant access plates for security and simple future maintenance.
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance.
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life.
- Stainless steel supply fittings connected to reinforced tubing.
- Water pressure range of 30-80 PSI.
- Timer controlled mist heads are made from heavy duty materials.
- Simple flow adjustment without dismantling of the shower with a water flow of 1.9 GPH.
- All flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards.
- ½" inlet stop valve for simple future maintenance.
- Standard Sky Blue finish with optional colors available.
- Custom color orders are non-cancellable and non-returnable.



(Shown above) Model 6450



ORDERING OPTIONS

Part Number

6425-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- SMP-6:** Surface Mounting Plate

6450-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- SMP-6:** Surface Mounting Plate

DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)


6425 88"H x 6-5/8" Dia

6450 84"H x 6-5/8" Dia

SPEC

Furnish and install Stern-Williams Comfort Spray Stations (specify model color). Spray stations shall be carbon steel or 304 stainless steel and a powder coated finish. Mist heads shall be chrome plated brass with a water pressure range of 30-80 PSI. Spray stations shall provide simple flow adjustment without requiring dismantling of shower with a water flow of 1 GPH. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Shower towers shall be installed per manufacturers recommendations and instructions. Shower tower flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards. Made in the USA.

6425

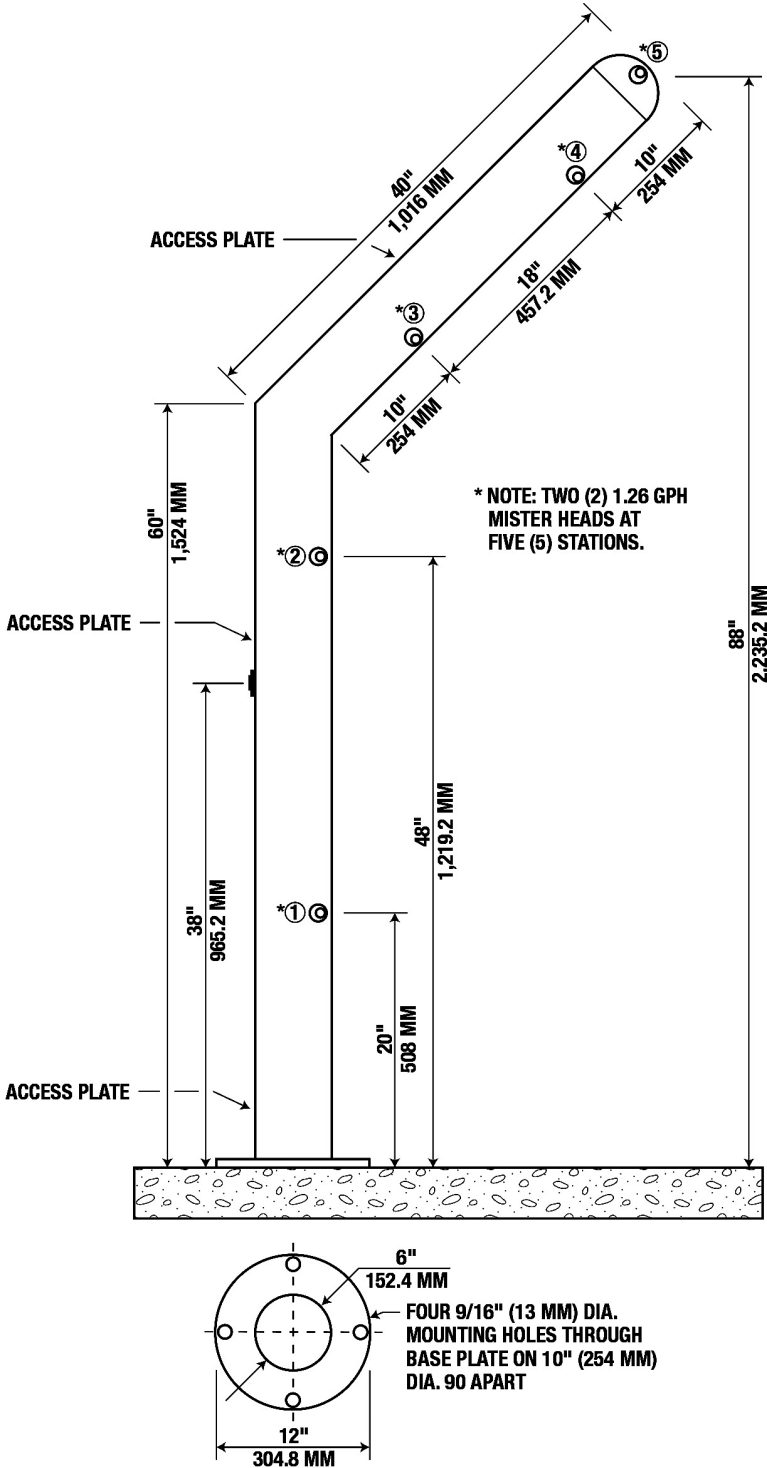

6450

