

MODEL 6600, 6630 & 6650

OUTDOOR SHOWER & FOOT SPRAY WITH DRINKING FOUNTAIN

An excellent choice where sand is prevalent at outdoor volley ball court & water front areas. Available with fountain attachments. Surface type with mounting plate welded to pedestal. Metering valve is standard. Model 6600 has a single fountain, model 6630 has two fountains and model 6650 includes a Sand Smart fountain. Models 6600 and 6630 are ADA compliant.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- All exposed parts are recessed in welded steel plates
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Vandal resistant bubbler guard unique to Stern Williams Fountains assures years of service
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life with a water flow of 0.5 GPM
- Large capacity powder coated trench type drain with removable internal sediment bucket (Model 6650 only)
- Stainless steel supply fittings connected to reinforced tubing
- Water pressure range of 30-80 PSI
- Simple flow adjustment without dismantling of the shower tower with a water flow of 2.5 GPM
- Timer controlled shower heads are made from heavy duty materials with a preset running time of 60 seconds that can be adjusted from 0 to 60 seconds
- Shower head spray pattern is adjustable from stream to mist
- All flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q \leq 1 (AB100) standards
- Drinking fountain includes an in-line mesh screen Y strainer
- ½" inlet stop valve for simple future maintenance
- 1 ¼" IPS waste pipes included on each fountain
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable



(Shown above) Model 6600



ORDERING OPTIONS

Part Number

6600-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 95:** Sand Trap
- 96:** Sand Strainer Plate
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

6630-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 95:** Sand Trap
- 96:** Sand Strainer Plate
- 100:** Solar Light
- RV:** Reverse Heights
- SMP-6:** Surface Mounting Plate

6650-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

6600 80"H x 26-5/8"W x 6-5/8"Dia. - Single Shower with Drinking Fountain / Surface Mount


6700 94"H x 26-5/8"W x 6-5/8"Dia. - Single Shower with Drinking Fountain / In Ground Bury

6630 80"H x 26-5/8"W x 6-5/8"Dia. - Single Shower with Dual Fountain / Surface Mount

6650 80"H x 26-5/8"W x 6-5/8"Dia. - Single Shower with Sand Smart Fountain / Surface Mount


SPEC


Furnish and install the Stern-Williams Outdoor Body and Foot Shower with Drinking Fountain (specify model color). Shower towers shall be carbon steel or 304 stainless steel and a powder coated finish. Fountain shall have chrome plated brass bubbler with vandal resistant bubbler guard. Shower tower and drinking fountain shall provide simple flow adjustment without requiring dismantling of shower with a water pressure range of 30-80 PSI. Shower heads shall include adjustable spray patterns and adjustable timing of 0-60 seconds. Shower tower shall have a water flow of 2.5 GPM and drinking fountain shall be 0.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Shower towers shall be installed per manufacturers recommendations and instructions. Shower tower flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards. ADA compliant models available. Made in the USA.

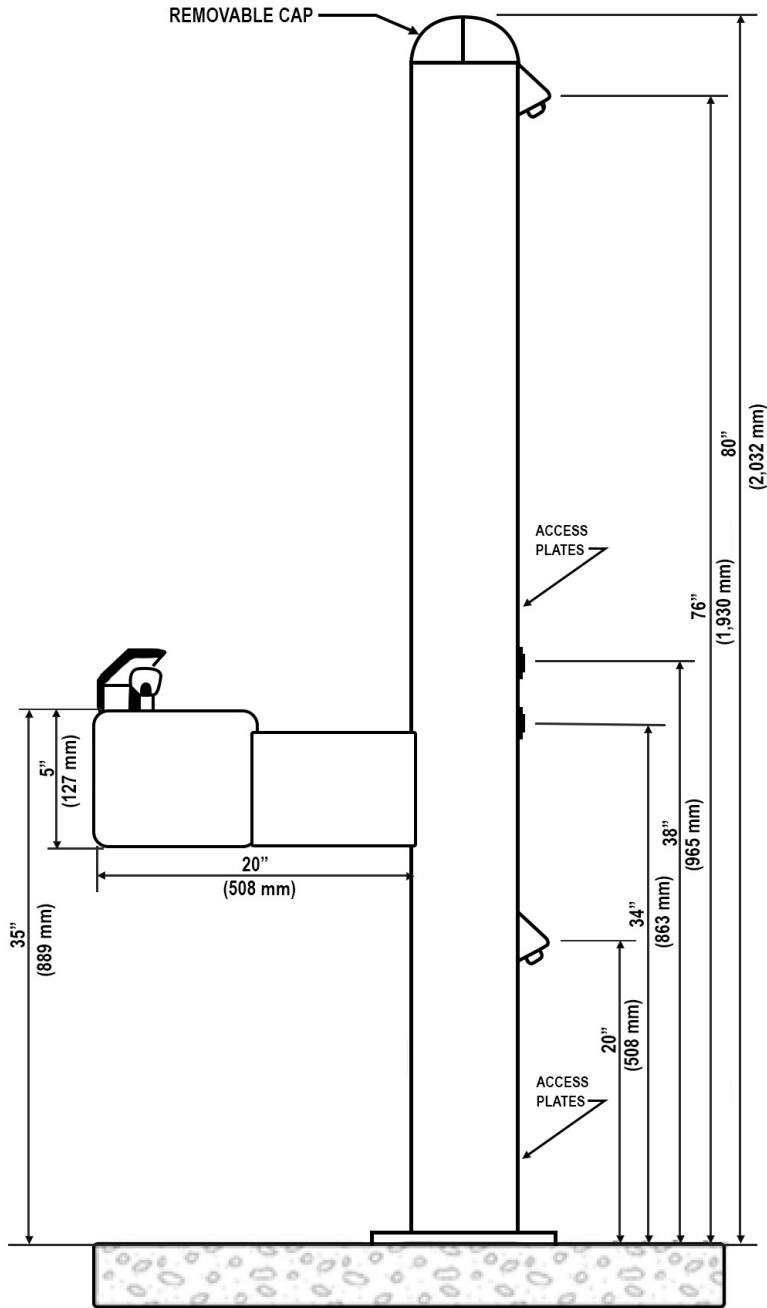


NOTE: FOUR 9/16" O.D. MOUNTING BOLTS SPACED ON A 10" DIA @ 90°

12" DIA PLATE



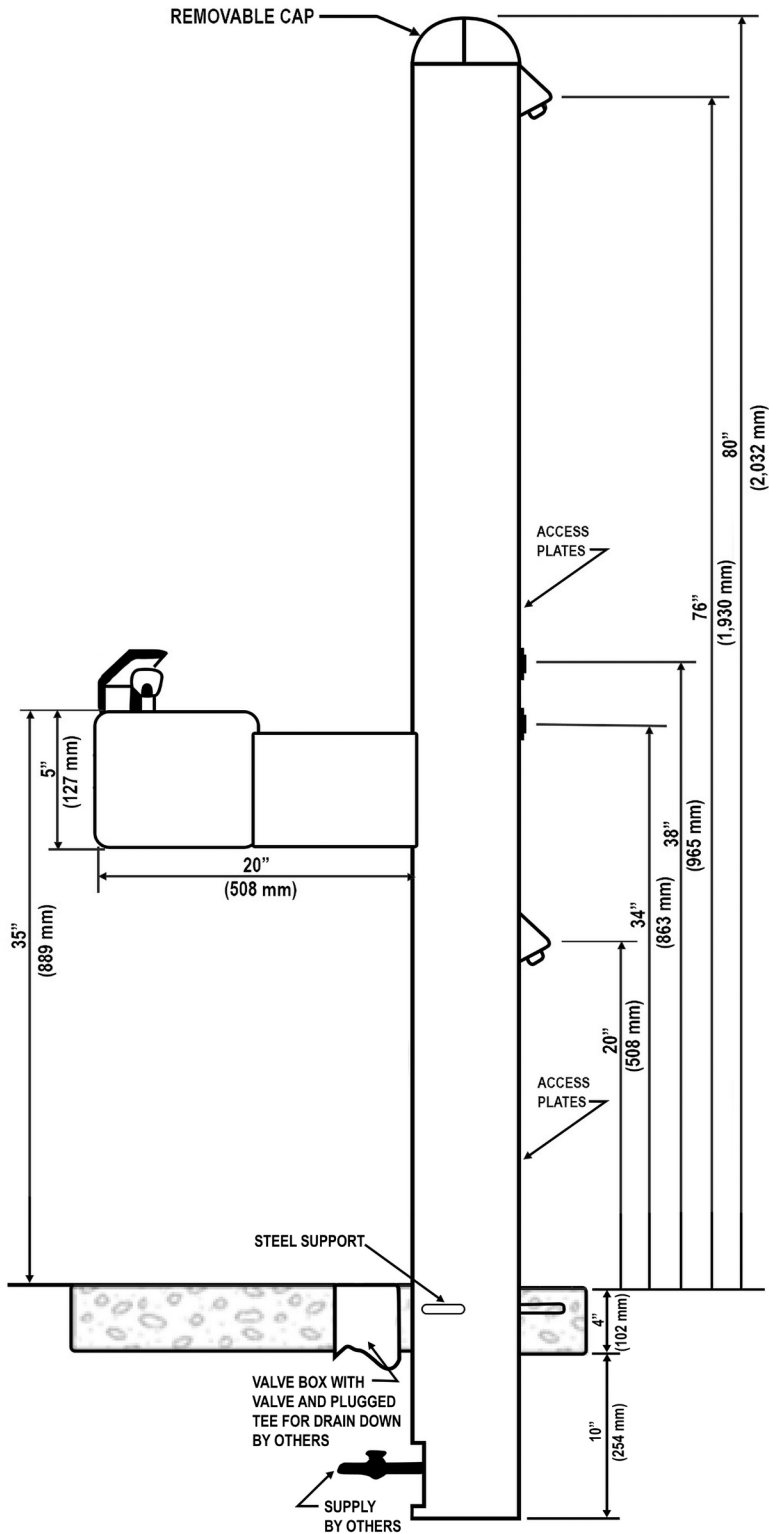


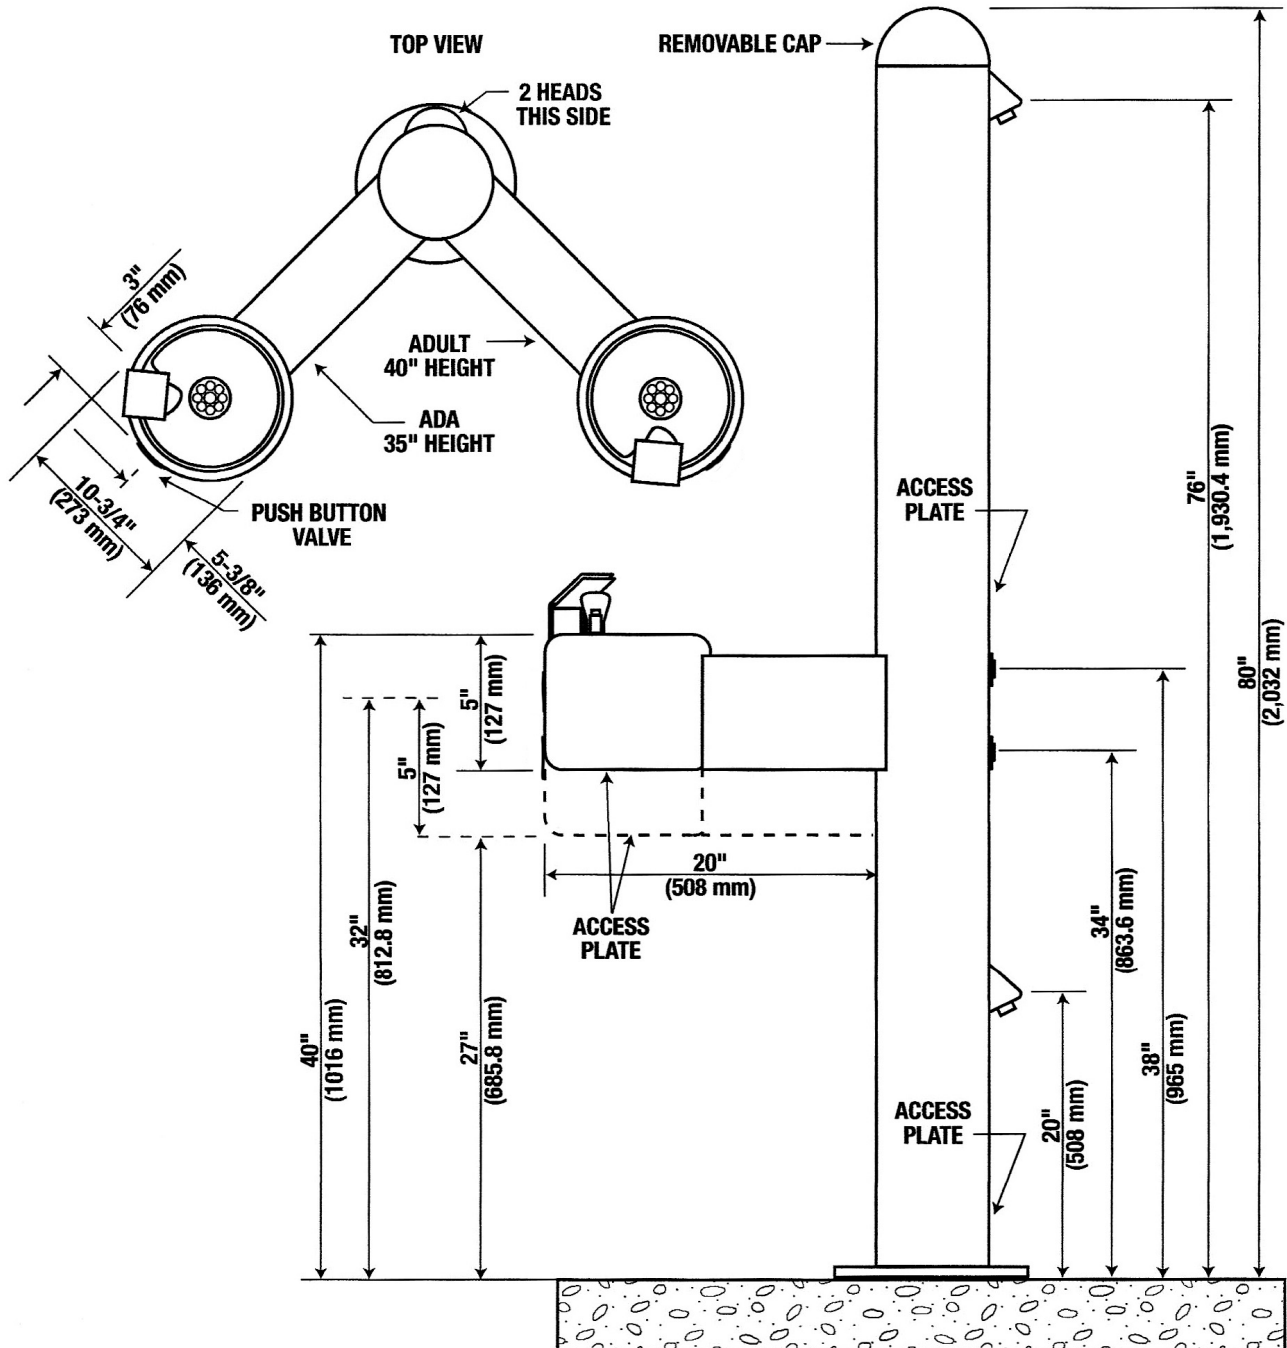

NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA. @ 90°


12" DIA. PLATE

6-5/8" (170 mm)



6650

6750

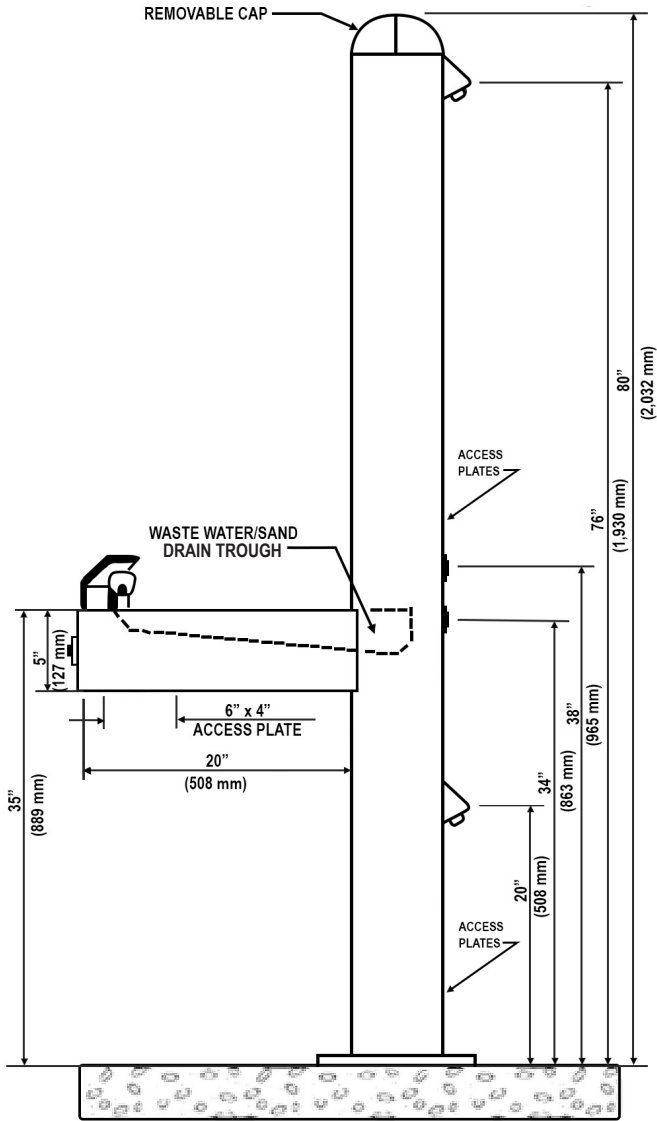

NOTE: FOUR 9/16" O.D. MOUNTING BOLTS SPACED ON A .10" DIA @ 90°

12" DIA PLATE

