

MODEL 6800, 6815, 6825 & 6835 WHEELCHAIR ACCESSIBLE SHOWER TOWERS

Our wheelchair accessible outdoor showers are great for beaches, pools, water parks, volleyball courts and any other recreation areas. Models 6825 and 6835 come with 2 grab bars.

Surface type with mounting plate welded to pedestal.

Metering valve is standard.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- All exposed parts are recessed in welded steel plates
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life
- Stainless steel supply fittings connected to reinforced tubing
- Water pressure range of 30-80 PSI
- Simple flow adjustment without dismantling of the shower tower with a water flow of 2.5 GPM
- Timer controlled shower heads are made from heavy duty materials with a preset running time of 60 seconds that can be adjusted from 0 to 60 seconds
- Shower head spray pattern is adjustable from stream to mist
- All flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards
- In-line mesh screen Y strainer
- ½" Inlet stop valve for simple future maintenance
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable



(Shown above) Model 6825



ORDERING OPTIONS

Part Number

6800-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

6815-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

6825-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

6835-



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key

- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve

- 40:** Commemorative Plaque
- 85:** Valve Box
- 87:** Metal Valve Box
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

DIMENSIONS


All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

- 6800** 80"H x 6 5/8"Dia – Side access
- 6815** 80"H x 6 5/8"Dia – Front access
- 6825** 80"H x 6 5/8"Dia – Side access with grab bar
- 6835** 80"H x 6 5/8"Dia – Front access with grab bar

SPEC

Furnish and install the Stern-Williams Wheelchair Accessible Shower Towers (specify model color). Shower towers shall be carbon steel or 304 stainless steel and a powder coated finish. Shower heads shall be lead free chrome plated brass with a water pressure range of 30-80 PSI. Shower heads shall include adjustable spray patterns and adjustable timing of 0-60 seconds. Shower towers shall provide simple flow adjustment without requiring dismantling of shower with a water flow of 2.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Shower towers shall be installed per manufacturers recommendations and instructions. Shower tower flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards. Made in the USA.


6800

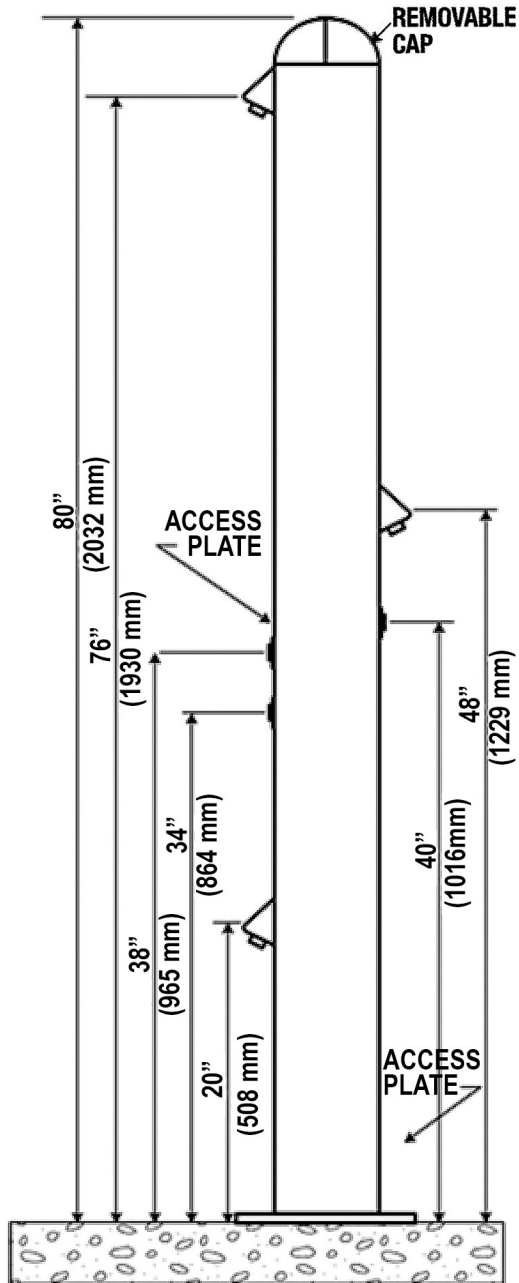


NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA.

@ 90°

12" DIA. PLATE




6900

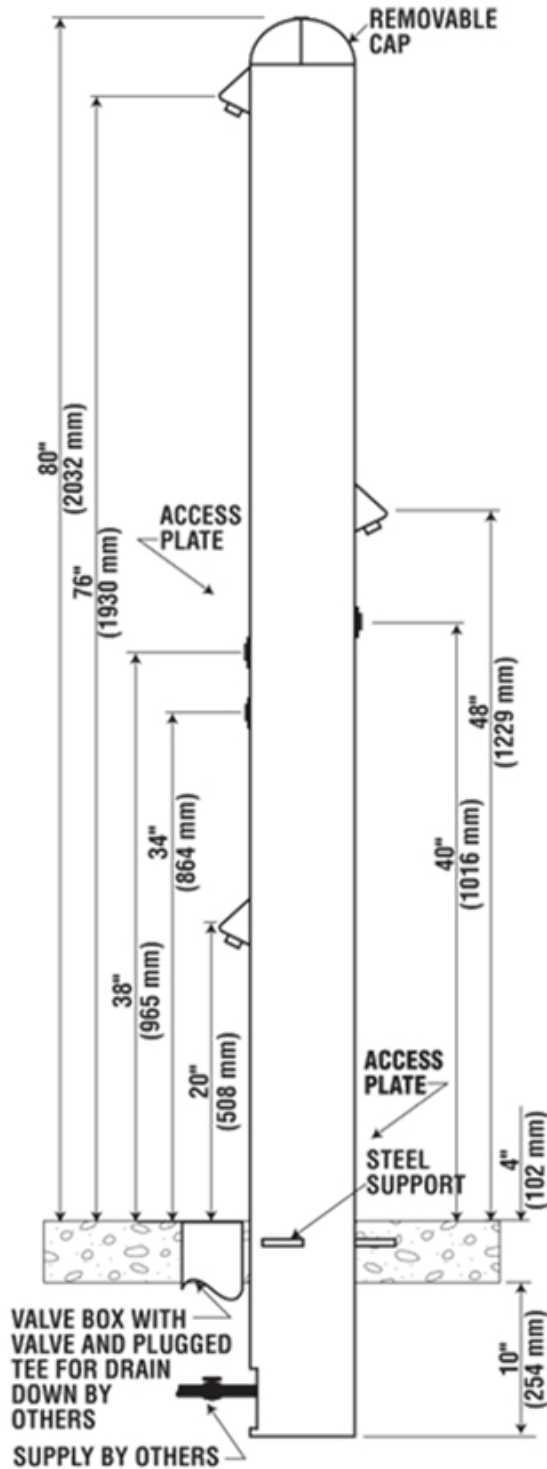


VALVE BOX WITH VALVE AND PLUGGED TEE FOR DRAIN DOWN BY OTHERS
SUPPLY BY OTHERS

6815

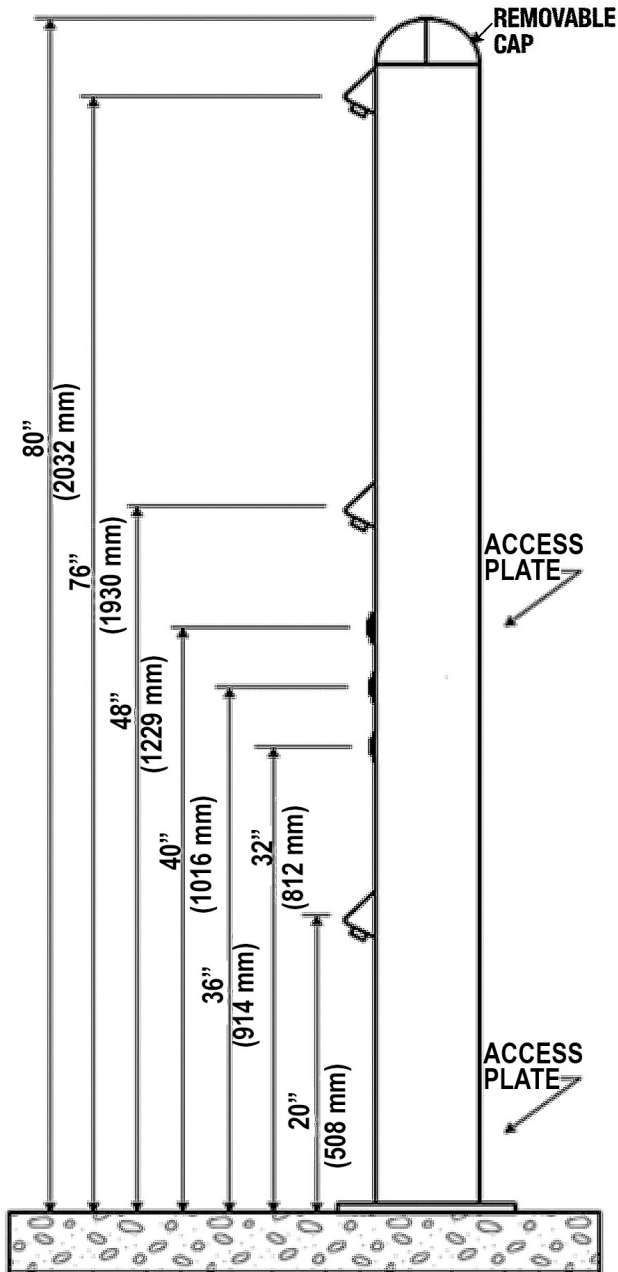



NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA. @ 90°

12" DIA. PLATE





6915

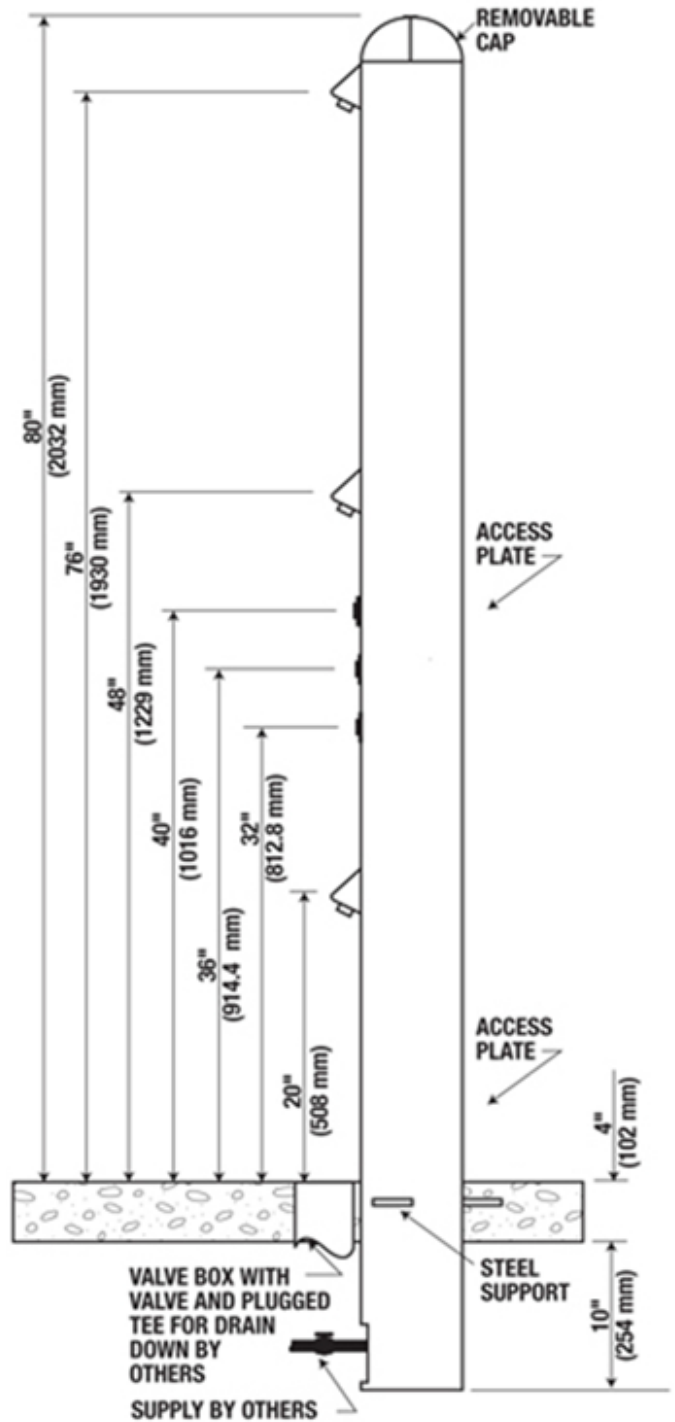

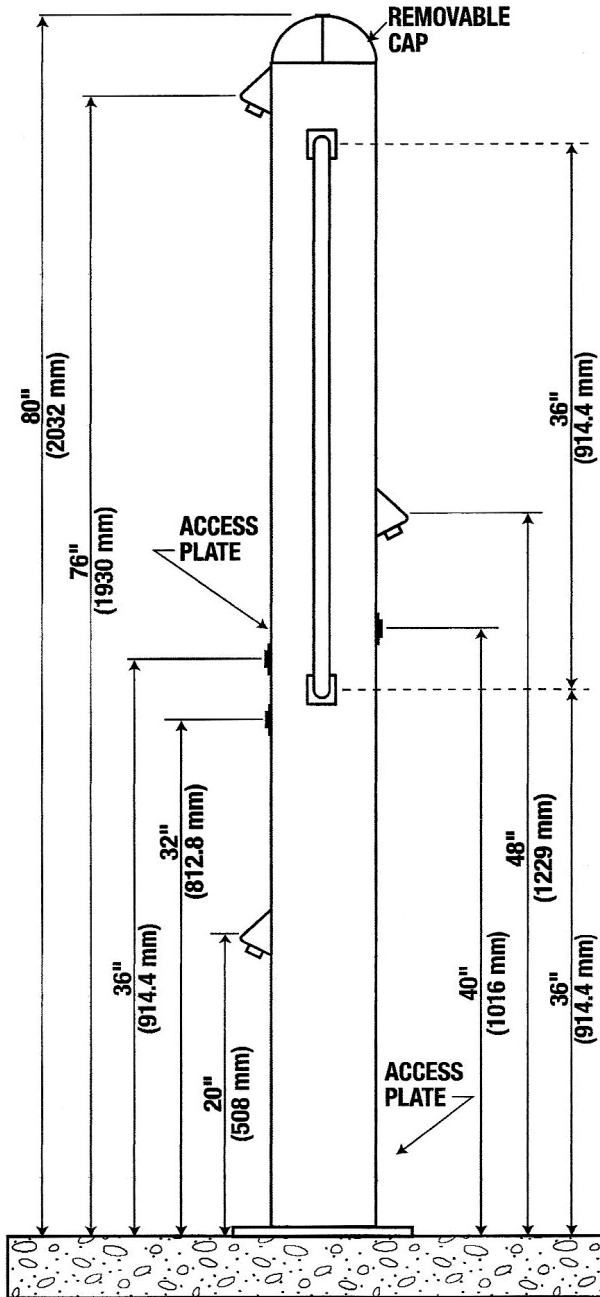
6825


NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA. @ 90°
 12" DIA. PLATE

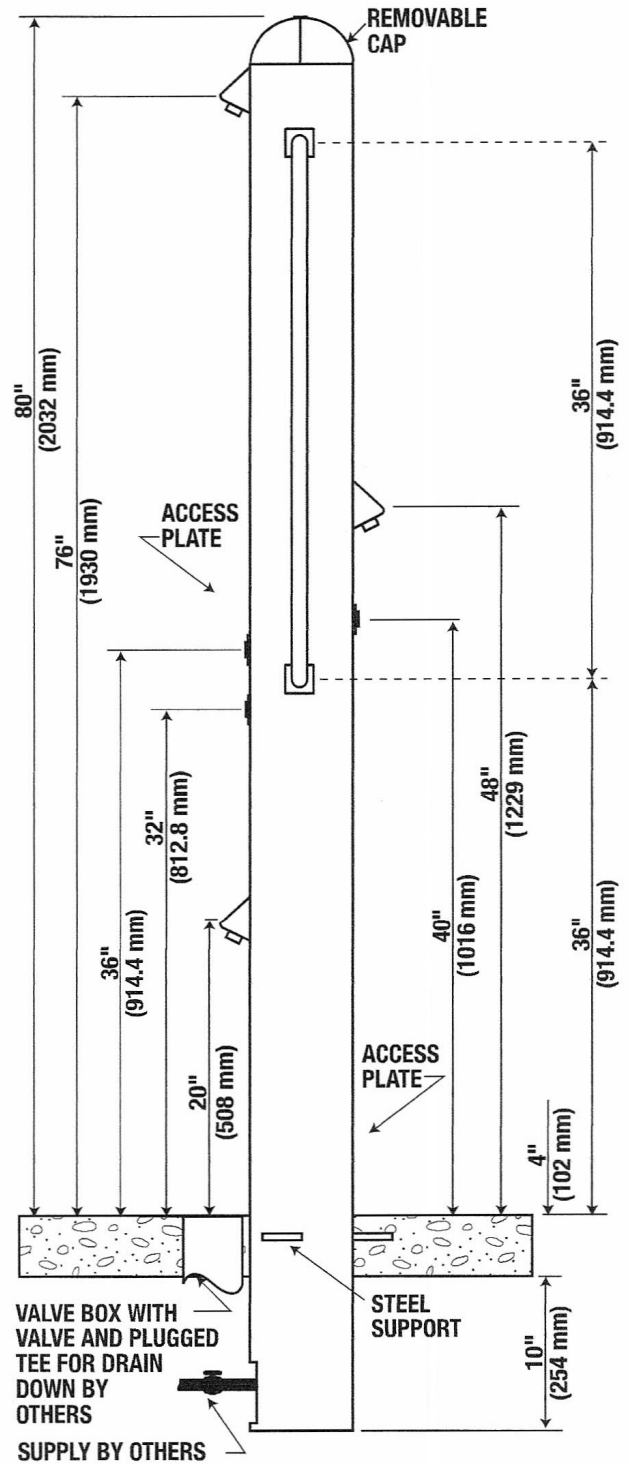

6925


VALVE BOX WITH VALVE AND PLUGGED TEE FOR DRAIN DOWN BY OTHERS
 SUPPLY BY OTHERS

6835

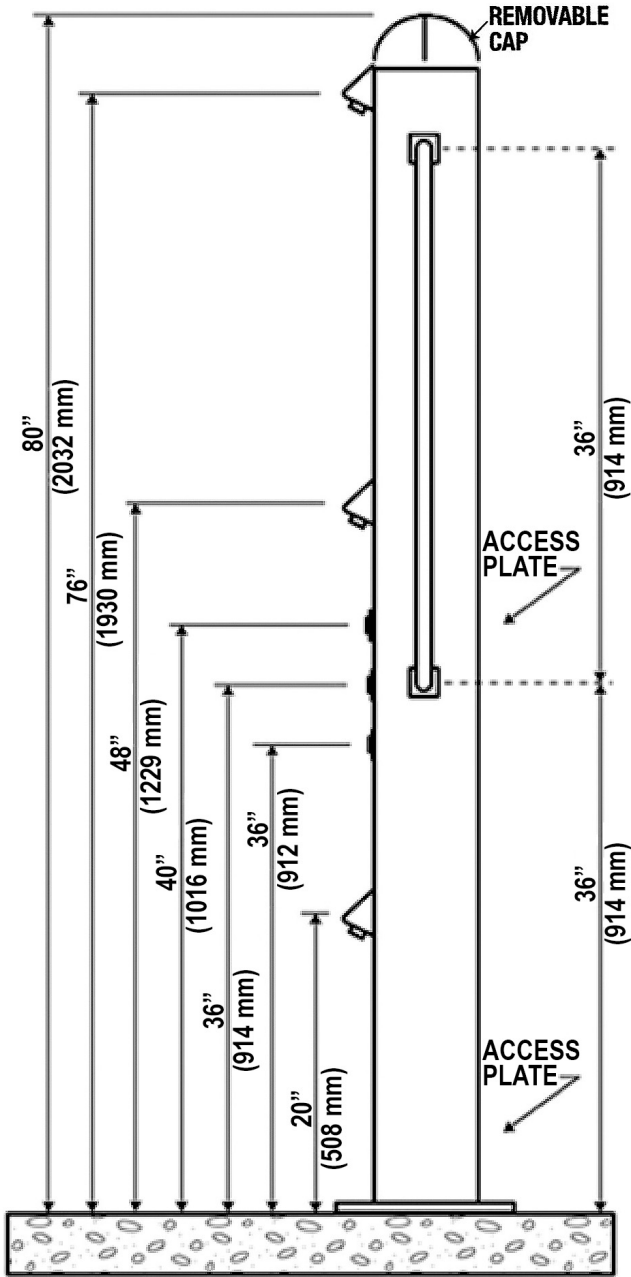


NOTE: FOUR 9/16" O.D. MOUNTING HOLES SPACED ON 10" DIA. @ 90°



12" DIA. PLATE

6935

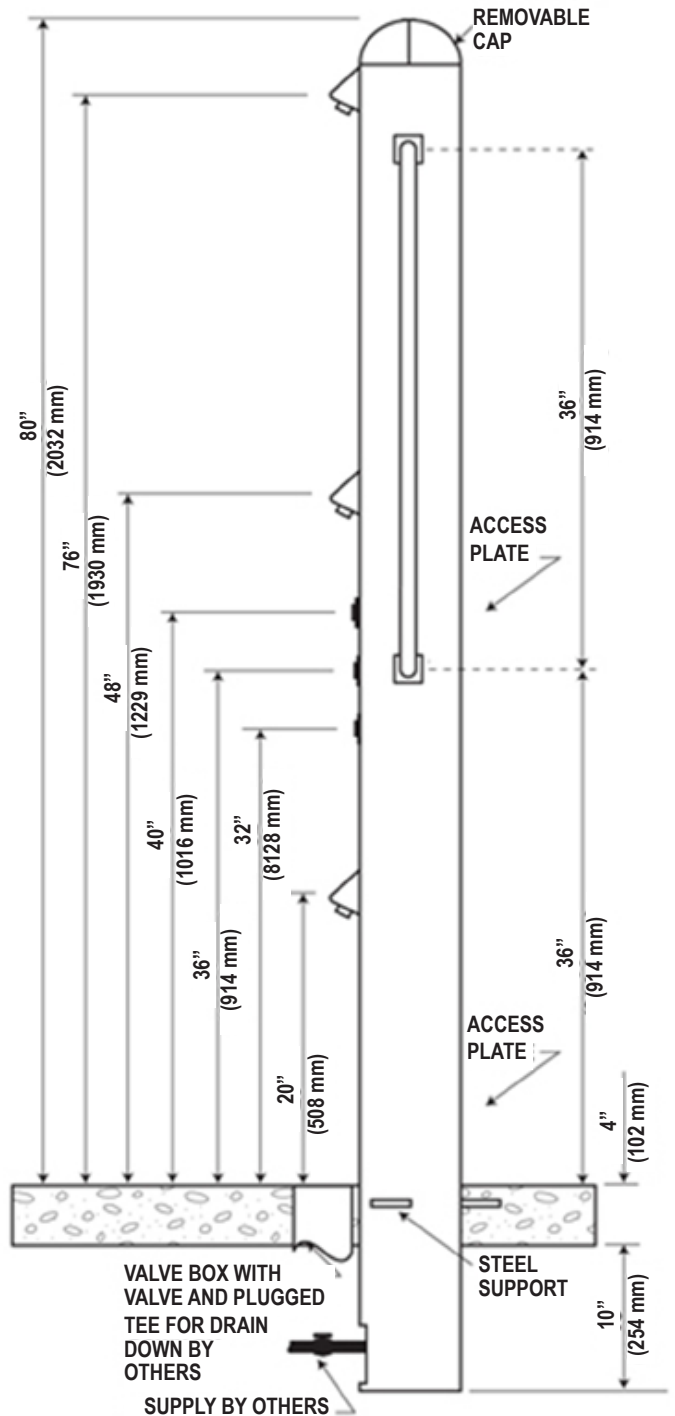

VALVE BOX WITH VALVE AND PLUGGED TEE FOR DRAIN DOWN BY OTHERS

SUPPLY BY OTHERS