

MODEL 6850 & 6950 TRIPLE OUTDOOR SHOWER AND FOOT SPRAY

One of our best complete line of outdoor showers with body sprays. These models are versatile and great for resorts, playgrounds, and recreational outdoor areas. These outdoor showers are designed to comply to the roughest conditions.

Model includes three chrome plated brass shower heads. Vandal proof design with no exposed fasteners, non removable spray heads with an adjustable spray pattern with an 1/8" allen wrench inserted through spray head orifice.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- All exposed parts are recessed in welded steel plates
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life
- ½" reinforced vinyl tubing with ½" IPS hook-ups and stainless steel supply fittings connected to reinforced tubing
- Water pressure range of 30-80 PSI
- Simple flow adjustment without dismantling of the shower tower with a water flow of 2.5 GPM
- Timer controlled shower heads are made from heavy duty materials with a preset running time of 60 seconds that can be adjusted from 0 to 60 seconds
- Shower head spray pattern is adjustable from stream to mist
- ½" inlet stop valve for simple future maintenance
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable





ORDERING OPTIONS

Part Number

6850-



Optional

- ☐ **SS:** Stainless steel finish
- ☐ **31 RCP:** Self closing jug filler
- ☐ **32:** RCP Hose bibb with VB
- ☐ **32-LK:** RCP Hose bibb with VB and Key
- ☐ **32-SC:** Self Closing Hose bibb with VB
- ☐ **32-VP:** Recessed vandal proof Hose bibb
- ☐ **35:** Recessed hose bibb
- ☐ **35-VP:** Recessed hose bibb with lock
- ☐ **37:** Foot Spray
- ☐ **38:** Shutdown/Drain Valve
- ☐ **40:** Commemorative Plaque
- ☐ **82:** Hand Wash Station
- ☐ **85:** Valve Box
- ☐ **87:** Metal Valve Box
- ☐ **100:** Solar Light
- ☐ **SMP-6:** Surface Mounting Plate

6950-



Optional

- ☐ **SS:** Stainless steel finish
- ☐ **31 RCP:** Self closing jug filler
- ☐ **32:** RCP Hose bibb with VB
- ☐ **32-LK:** RCP Hose bibb with VB and Key
- ☐ **32-SC:** Self Closing Hose bibb with VB
- ☐ **32-VP:** Recessed vandal proof Hose bibb
- ☐ **35:** Recessed hose bibb
- ☐ **35-VP:** Recessed hose bibb with lock
- ☐ **38:** Shutdown/Drain Valve
- ☐ **40:** Commemorative Plaque
- ☐ **82:** Hand Wash Station
- ☐ **85:** Valve Box
- ☐ **87:** Metal Valve Box
- ☐ **100:** Solar Light
- ☐ **SMP-6:** Surface Mounting Plate

SPEC

Furnish and install Stern-Williams Triple Outdoor Shower and Foot Spray (specify model # and options). Shower towers shall be carbon steel or 304 stainless steel and a powder coated finish. Shower heads shall be chrome plated brass with a water pressure range of 30-80 PSI. Shower heads shall include adjustable spray patterns and adjustable timing of 0-60 seconds. Shower towers shall provide simple flow adjustment without requiring dismantling of shower with a water flow of 2.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Shower towers shall be installed per manufacturers recommendations and instructions. Made in the USA.


DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

6850 80"H x 6-5/8"Dia.

6950 90"H x 6-5/8"Dia.

6850

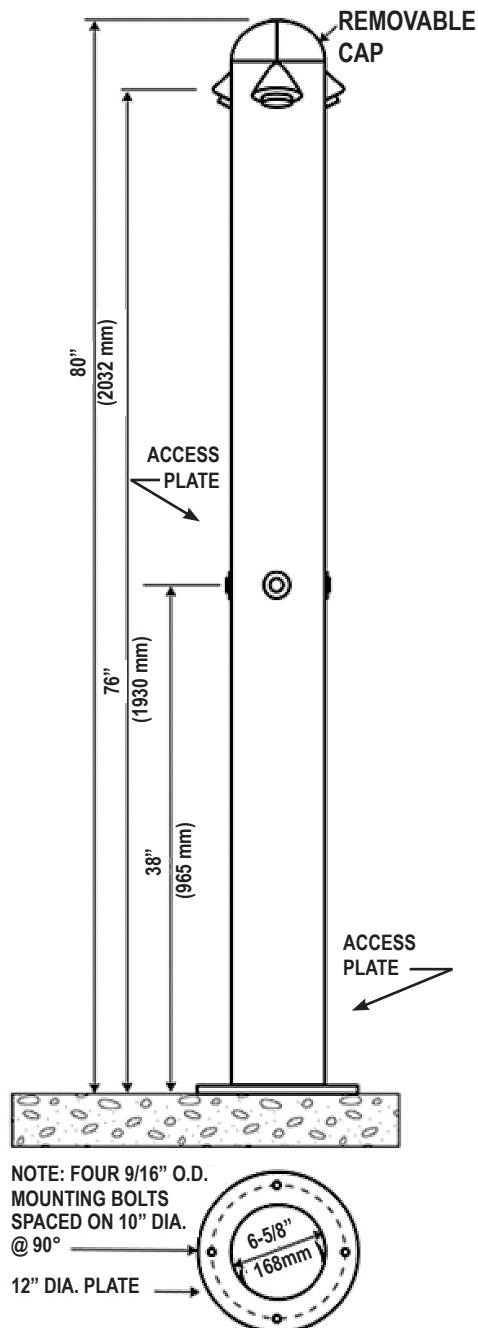

6950

