

ADA Compliant NSF/ANSI/CAN 61: Q≤1 (AB100) Compliant



MODEL 7300 & 7315 WALL MOUNTED BOTTLE FILLER

A convenient station designed to refill reusable water bottles with filtered water.

ADA Compliant

Model 7300 is a bottle filler only. Model 7315 is a bottle filler and drinking fountain.

FEATURES —

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Vandal resistant bubbler guard unique to Stern Williams Fountains assures years of service
- Brushed aluminum filler spout
- Water pressure range of 30-80 PSI
- Optional WMP-1 (7300) or WMP-2 (7315) mounting plates for installation assistance
- Optional FLWMP-1 (7300) or FLWMP-2 (7315) floor support carried is available and advisable for in wall installation
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life with a water flow of 0.5 GPM
- Simple flow adjustment without requiring the dismantling of the fountain
- Fountain Bowl is heavy duty 18 gauge stainless steel with brushed finish and vandal-resistant chrome plated brass strainer. A drain tool is included with each fountain
- All flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards
- In-line mesh screen Y strainer
- $\frac{1}{2}$ " Inlet stop valve for simple future maintenance
- $1\frac{1}{4}$ " IPS waste pipes included on each fountain
- Standard Woodland Green finish with optional colors available

-BL	-GR	-OR	-RD	-YL	-SV	-WH	-BZ	-SD	-BK	-CC


(Shown above) Model 7300

13920 Cypress Lane Grandview, MO 64030 | 800-323-2359 | sternwilliams.com





ORDERING OPTIONS -

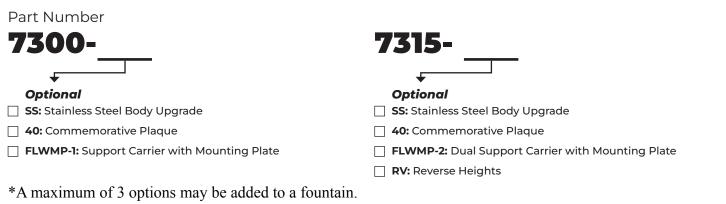

DIMENSIONS -


All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

7300 27"H x 20"L **7315** 34-1/2"H x 20"L

SPEC ——

Furnish and install Stern-Williams Water Bottle Filler (specify model # and options). Drinking fountain shall be carbon steel or 304 stainless steel and a powder coated finish. Fountain shall have chrome plated brass bubblers with vandal resistant bubbler guard. Water pressure range shall be 30-80 PSI. Fountains shall provide for simple flow adjustment without requiring dismantling of fountain with a water flow of 0.5 GPM. Joints must be welded and ground smooth. Push buttons shall require less than 5 lbs of force in compliance with ADA code. Fountains shall be installed per manufacturers recommendations and instructions. Drinking fountain flow paths are lead-free with reinforced stainless-steel tubing that comply with NSF-61 standards. Made in the USA.



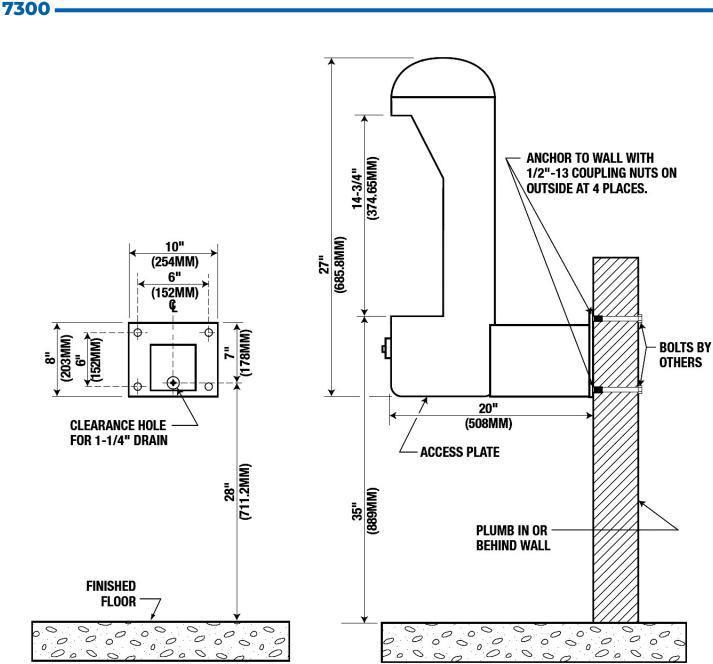


VIEW FOR MOUNTING

0 0

> **NOTE: OPTIONAL FLOOR SUPPORT CARRIER FLWMP-1 IS AVAILABLE** AND ADVISABLE FOR IN WALL INSTALLATION.






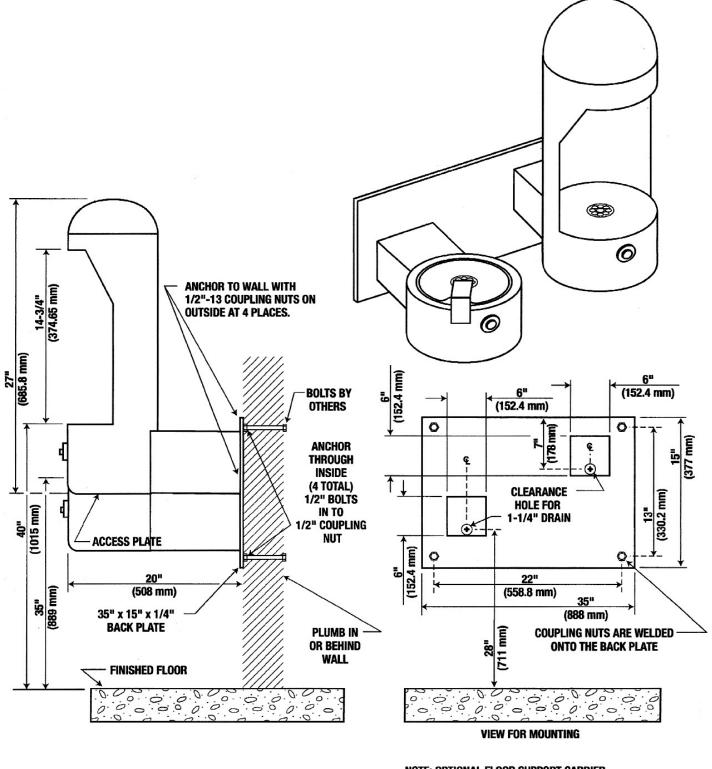

NOTE: OPTIONAL FLOOR SUPPORT CARRIER FLWMP-2 IS AVAILABLE AND ADVISABLE FOR IN WALL INSTALLATION.





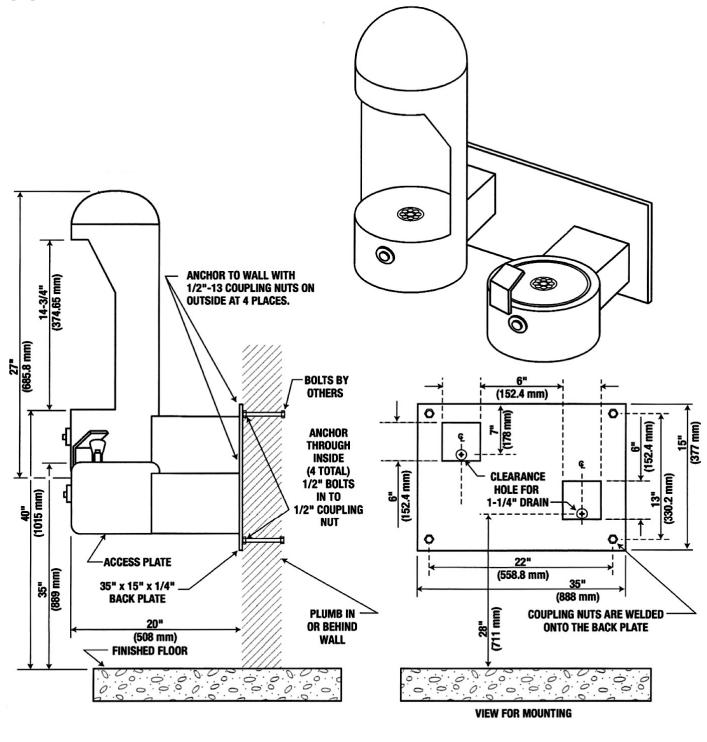

NOTE: OPTIONAL FLOOR SUPPORT CARRIER FLWMP-2 IS AVAILABLE AND ADVISABLE FOR IN WALL INSTALLATION.