

MODEL 7325 SINGLE WATER BOTTLE FILLER STATION

Designed to be a convenient station to refill reusable water bottles with filtered water. Includes a brushed aluminum filler spout.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance.
- Stainless Steel (-SS) bodies available for harsh coastal environments.
- Vandal resistant access plates for security and simple future maintenance.
- Vandal resistant bubbler guard unique to Stern Williams Fountains assures years of service .
- Water pressure range of 30-80 PSI.
- Anchor installed mounting plate comes standard, ground installed mounting plate available as an option for installation assistance (SMP-6).
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life with a water flow of 0.5 GPM.
- Simple flow adjustment without requiring the dismantling of the fountain.
- Fountain Bowl is heavy duty 18 gauge stainless steel with brushed finish and vandal-resistant chrome plated brass strainer. A drain tool is included with each fountain.
- All flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards.
- In-line mesh screen Y strainer.
- ½” Inlet stop valve for simple future maintenance.
- 1 ¼” IPS waste pipes included on each fountain.
- Standard Woodland Green finish with optional colors available.



ORDERING OPTIONS

Part Number

7325 -



Optional

- SS:** Stainless Steel Body Upgrade
- 31:** Chrome Plated Jug Filler
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandalproof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 36:** Push Button Jug Filler
- 37:** Foot Spray
- 38:** Shutdown Drain Valve
- 40:** Commemorative Plaque
- 76:** Fountain Chiller
- 84:** Water Filter
- 85:** Ground Valve Box with Lid
- 86:** Attached Metal Valve Box
- 90:** Pet fountain
- 95:** Sand Trap
- 96:** Sand Strainer Plate
- 100:** Solar Light
- SMP-6:** Surface Mounting Plate

*A maximum of 3 options may be added to a fountain.


DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

7325 59"H x 6-5/8" Dia

SPEC

Furnish and install Stern-Williams Single Water Bottle Filler Station (specify model # and options). Drinking fountain shall be carbon steel or 304 stainless steel and a powder coated finish. Fountain shall have an aluminum brushed filler spout. Welded anchor base shall be 1/2" thick. Joints must be welded and ground smooth. Push buttons shall require less than 5 lbs of force in compliance with ADA code. Fountains shall be installed per manufacturers recommendations and instructions. Drinking fountain flow paths are lead-free with reinforced stainless-steel tubing that complies with NSF/ANSI/CAN 61: Q≤1 (AB100) standards. Made in the USA.

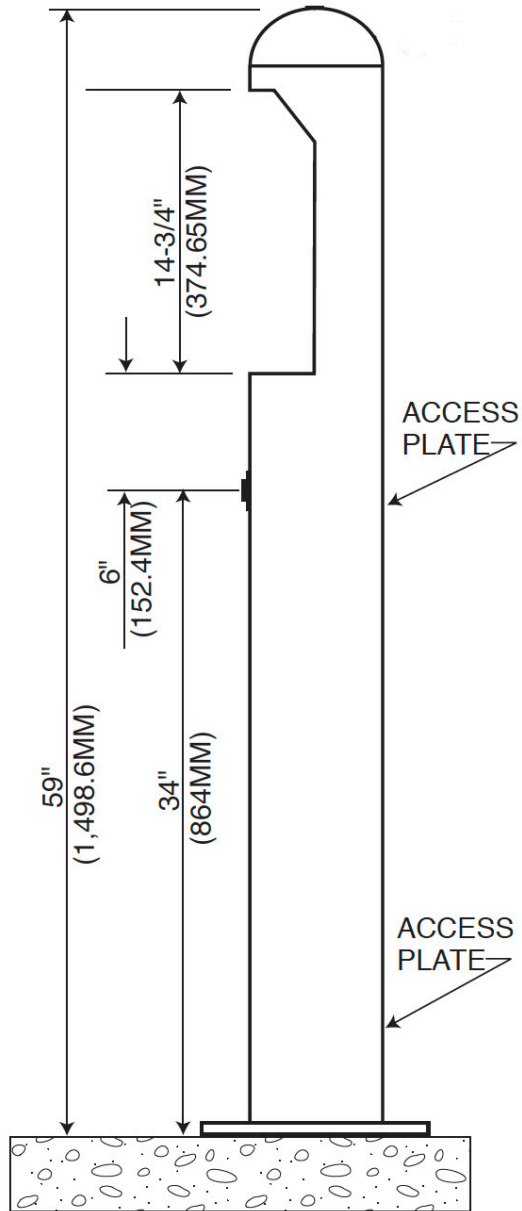

NOTE: FOUR 9/16" O.D.
MOUNTING HOLES
SPACED ON
10" DIA. @ 90°

12" DIA. PLATE

