

MODEL 6000 & 6000-MWL OUTDOOR FOOT SHOWERS

Metal Pedestal Outdoor Foot Showers are an excellent choice for resorts, playgrounds, volleyball courts and any other recreational area. Surface type with mounting plate welded to pedestal.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- All exposed parts are recessed in welded steel plates
- Stainless Steel (-SS) bodies available for harsh coastal environments
- Vandal resistant access plates for security and simple future maintenance
- Optional mounting plates available for installation assistance
 - **SMP-6:** Surface mounting plate
 - **IBA-6:** In-ground mounting plate
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life
- ½” reinforced vinyl tubing with ½” IPS hook-up and stainless steel supply fittings connected to reinforced tubing
- Water pressure range of 30-80 PSI
- Simple flow adjustment without dismantling of the shower with a water flow of 2.5 GPM
- Timer controlled foot showers are made from heavy duty materials with a preset running time of 60 seconds that can be adjusted from 0 to 60 seconds
- Foot shower spray pattern is adjustable from stream to mist
- ½” inlet stop valve for simple future maintenance
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable





ORDERING OPTIONS

Part Number


6000-



Optional

- SS:** Stainless Steel Body Upgrade
- 32:** RCP Hose Bibb with VB
- 32-LK:** RCP Hose Bibb with VB and Key
- 32-SC:** Self Closing Hose Bibb with VB
- 32-VP:** Recessed Vandal Proof Valve
- 35:** Recessed Compression Type
- 35-VP:** Recessed Hose Bibb with Lock
- 38:** Shutdown/Drain Valve
- 40:** Commemorative Plaque
- 85:** Valve Box
- 90:** Pet Fountain
- 96:** Sand Trap
- SMP-6:** Surface Mounting Plate
- IBA-6:** In-Ground Bury Adapter

6000-MWL-



Optional

- SS:** Stainless Steel Body Upgrade
- 40:** Commemorative Plaque


DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

- 6000** 32"H x 6-5/8"W - Surface mount
- 6000-MWL** 8"H x 8"W - Wall mount


SPEC

Furnish and install the Stern-Williams Foot Wash Showers (specify model color). Foot showers shall be carbon steel or 304 stainless steel and a powder coated finish. Foot shower heads shall be chrome plated brass with a water pressure range of 30-80 PSI. Foot showers shall include adjustable spray patterns and adjustable timing of 0-60 seconds. Foot showers shall provide simple flow adjustment without requiring dismantling of shower with a water flow of 2.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Foot showers shall be installed per manufacturers recommendations and instructions. Made in the USA.

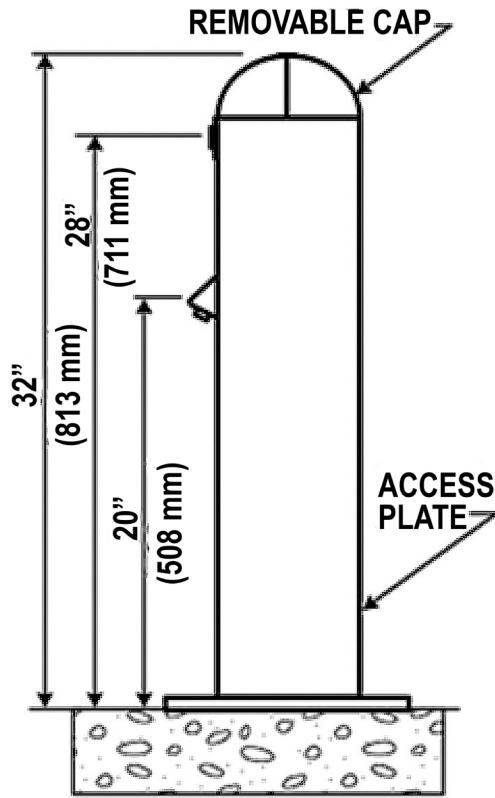

NOTE: FOUR 9/16" O.D. MOUNTING BOLTS SPACED ON 10" DIA. @90°

12" DIA. PLATE



6000-MWL

