

54-HC, 84.5-HC & 98-HC TRIESTE WHEELCHAIR SHOWER FLOOR

Choice of styles for greater design flexibility. For a room-corner shower, specify model with two sides flanged and threshold on two sides. For recessed installation, specify model with three sides flanged and threshold on one side.



Models 54-HC, 84.5-HC, and 98-HC are wheelchair accessible floors with ramp on threshold

(Shown above) Model 54-HC

FEATURES

- Terrazzo is cast in white Portland cement with a composition of black and white quartz, marble and other material chips, then ground smooth, grouted and sealed to resist stains and moisture which produces a compressive strength of 3000 PSI seven days after casting.
- Terrazzo's natural non-slip surface provides better footing and increased safety.
- Stainless steel drain cast integral with removable stainless steel strainer (S423-0105), and sized for a gasket (QDC4000 included for 2" XHCI, plastic or steel pipe) or a caulked lead connection not less than 1" deep to a 3" pipe.
- Custom configurations available - Drain positions, overall sizes, color options. Call for more information and pricing.

OPTIONAL COMPONENTS

- RDM:** Collapsible Water Dam
- QIC2000:** 2" Drain Gasket for a 2" Pipe - No Hub
- TC-2:** 2" Drain Gasket for a 2" Pipe - Brass drains only

ORDERING OPTIONS

Part Number





Size

- 54-HC:** 36x36
- 84.5-HC:** 48x36
- 98-HC:** 60x60

DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

MODEL	FLANGES	THRESHOLD	SIZE	A	B	C	D	E	F	G	H
54-HC	3 sides	1 side	36X36	36	36	12	18	24	12	4	3
84.5-HC	3 sides	1 side	48X36	36	48	12	24	24	12	4	3
98-HC	3 sides	1 side	60X60	60	60	21	30	42	18	4	3

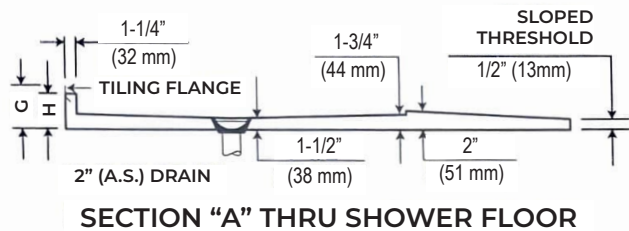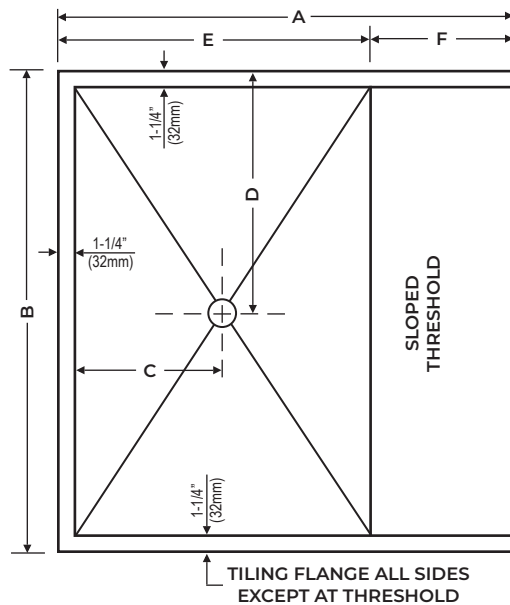

SPECS

Furnish and install Trieste shower floors with wheelchair accessible ramp on threshold manufactured by Stern-Williams using black and white chips cast in white Portland cement. The terrazzo material shall have a compressive strength not less than 3000 PSI after full cure. All exposed terrazzo surfaces shall be ground smooth, grouted, and factory sealed to resist stains and moisture. Tiling flanges, cast integral on three sides shall be of stainless steel and shall not extend not less than one inch above the shoulder. Shower floors include a stainless steel drain body that is cast integral to the shower floor with a removable type stainless steel strainer. Drain shall have inside connection to a 2" pipe sealed with factory provided gasket. Shall be made in the USA.