

MODEL HSC-430 65" x 33" COMPLETE SHOWER CABINET - WHEELCHAIR ACCESSIBLE

This model is designed with accessibility and functionality in mind. We recommend installing a floor drain at the unit entrance.

FEATURES

- Includes a roll-in type Terrazzo shower floor
- Includes the SC-140-SS pressure-balanced mixing valve, which includes integrated service stops for maintenance ease
- Hand-held shower head with a swivel connection
- 69" flexible chrome-plated brass hose, and an in-line vacuum breaker
- Stainless steel curtain rod and GSA-approved privacy curtain are provided
- Horizontal and vertical stainless steel grab bars with concealed mounting.
- Terrazzo floor has 2" threshold and will require recess in floor for ADA accessibility
- Standard wall finish is white powder coated metal.
- Retractable handicapped shower seat with stainless steel frame
- Specify R or L hand drilling




(Shown above) Model HSC-430



ORDERING OPTIONS

Part Number

HSC-XX-



Package Options:

- ☐ **HSC-430:** Complete Shower Package - Roll-In
- ☐ **HSC-430-B:** Shower Base only
- ☐ **HSC-430-HDP-NV:** Complete Shower Package Roll-In, High Density Walls, Less Valve
- ☐ **HSC-430-NV-LS:** Complete Shower Package Roll-In, Less Valve, Left Seat
- ☐ **HSC-430-NV-RS:** Complete Shower Package Roll-In, Less Valve, Right Seat
- ☐ **HSC-430-WLS:** Wall Package, White Powder Coat
- ☐ **HSC-430-WLS-HDP:** Wall Package, High Density Polymer (White)
- ☐ **HSC-430-WLS-SPC:** Wall Package, Solid Phenolic Core
- ☐ **HSC-430-WLS-SS:** Wall Package, Stainless Steel

Optional Components:

- ☐ **SC-6:** Filler strip - Front
- ☐ **SC-7:** Filler strip - Back
- ☐ **HSC-TC-143:** Top cover only
- ☐ **HSC-TCLF-400:** Top cover with Light
- ☐ **SC-140-TCVH:** Thermostatic valve
- ☐ **Valve By Others**

FINISHES KEY FOR WALL PACKAGES (-WLS):

Powder Coat on Galvanized Steel (standard)

SS: Stainless steel

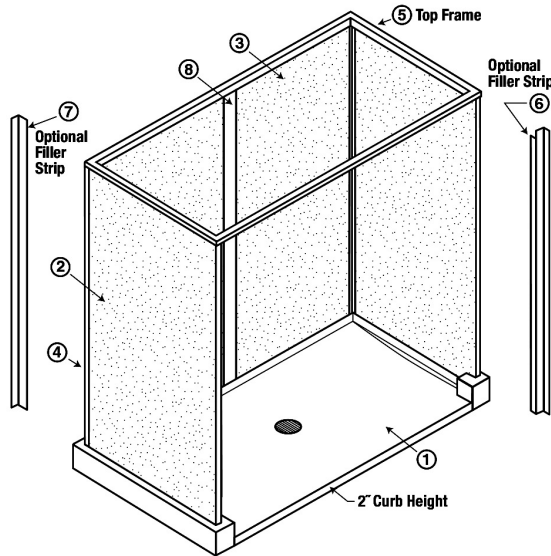
SPC: Solid phenolic core *

HDP: High density polymer*

DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

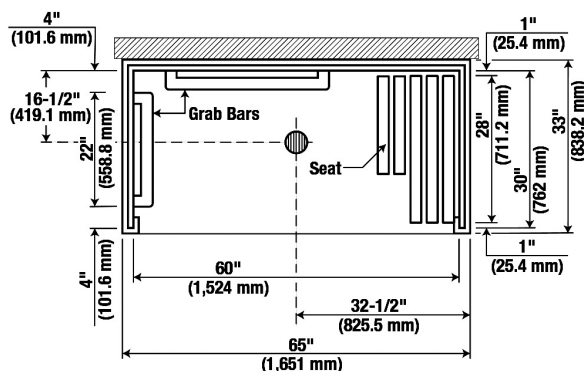
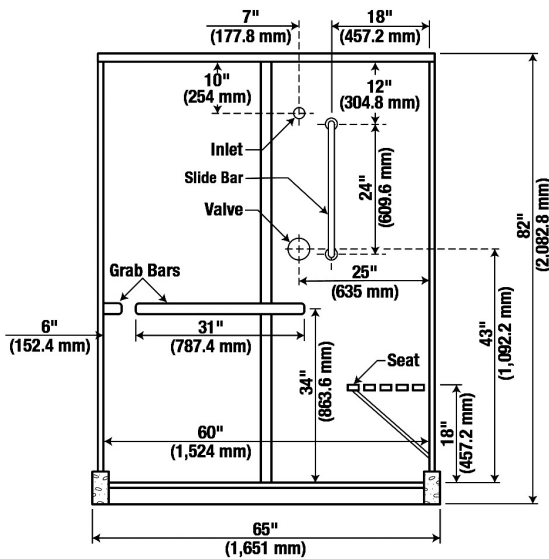
HSC-430 65x33x82"


STANDARD EQUIPMENT FOR FIELD INSTALLATION

KEY NO.	QTY.	DESCRIPTION
1	1	65" X 33" BASE
2	2	30" X 77-3/16" PANEL
3	1	60" X 77-3/16" BACK PANEL
4	2	CORNER JOINT
5	1	TOP FRAME
—	1	ROD AND CURTAIN
—	1	PRESSURE BALANCED VALVE WITH STOPS
—	1	HAND HELD SHOWER HEAD WITH SWIVEL CONNECTOR, SUPPLY ELL, VACUUM BREAKER AND 69" C.P. FLEXIBLE BRASS HOSE
—	1	24" C.P. BRASS SLIDE BAR WITH ADJUSTABLE SHOWER HEAD MOUNTING BRACKET AND MOUNTING SCREWS.
—	2	HORIZONTAL STAINLESS STEEL GRAB BAR
8	1	CHANNEL BRACKET
—	1	RETRACTABLE HANDICAPPED SHOWER SEAT WITH STAINLESS STEEL FRAME

FOR CORRECT INSTALLATION:

1. ESTABLISH PROPER CLEARANCE BETWEEN SHOWER BASE AND WALLS.
2. SET SHOWER BASE ON MORTAR BED AND CAREFULLY LEVEL TO AVOID PROBLEMS OF UNEVEN SUB FLOOR.


WE SUGGEST A FLOOR DRAIN AT THE ENTRANCE TO THE WHEELCHAIR SHOWER FLOOR
NOTE:

1. For Barrier-Free installation Contractor shall provide recess for curb.