


MODEL HSC-143 40" x 40" COMPLETE SHOWER CABINET - WHEELCHAIR ACCESSIBLE

This model is designed with accessibility and functionality in mind. Threshold includes a 6" stainless steel entry cap and provides ½" entry on integral ramp when installed per specification guidelines. We recommend installing a floor drain at the unit entrance.

FEATURES

- Specify R or L hand drilling
- Durable, white powder-coated metal panels
- Includes the SC-140-SS pressure-balanced mixing valve, which includes integrated service stops for maintenance ease
- Hand-held shower head with a swivel connection
- 69" flexible chrome-plated brass hose, and an in-line vacuum breaker
- Stainless steel curtain rod and GSA-approved privacy curtain are provided
- Retractable shower seat with a robust stainless steel frame
- Two stainless steel grab bars for reliable support

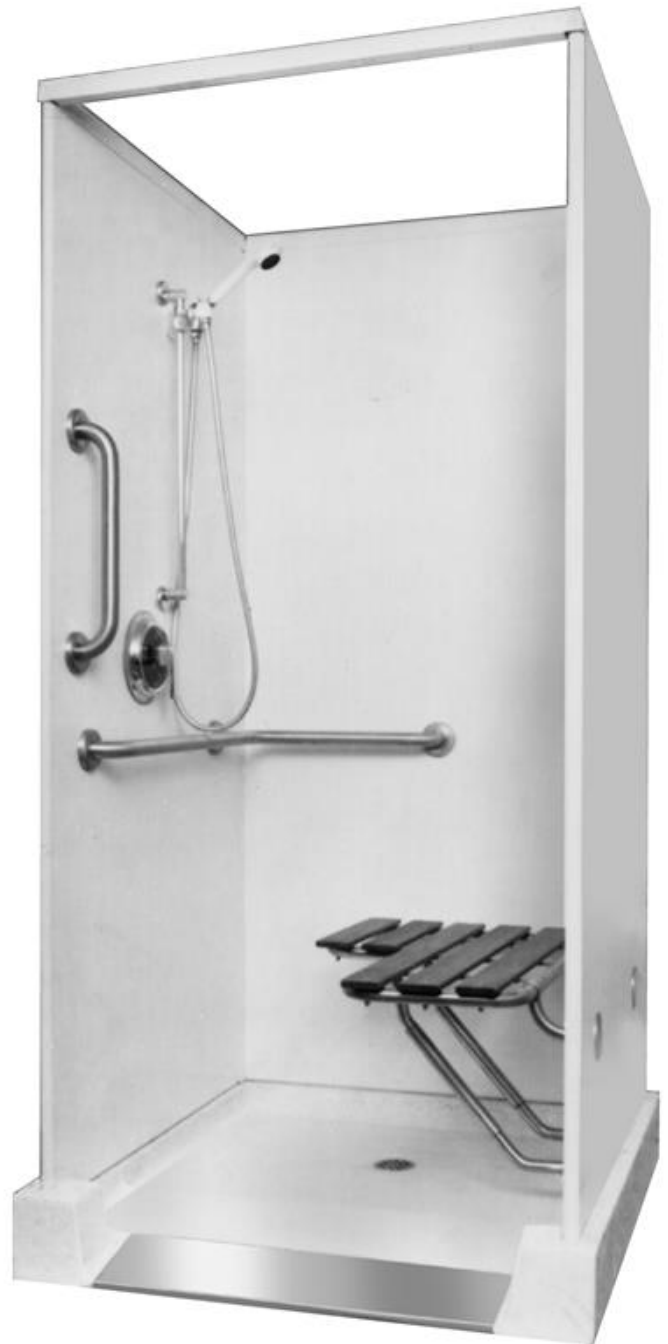

(Shown above) Model HSC-143



ORDERING OPTIONS

Part Number

HSC-XXX-

Package Options:

- ☐ **HSC-143:** Complete Shower Package w/Ramp
- ☐ **HSC-143-B:** Shower Base only
- ☐ **HSC-143-HDP:** Complete Shower Package w/Ramp, HDP Walls
- ☐ **HSC-143-NF:** Complete Shower Package w/Ramp, No Fixtures
- ☐ **HSC-143-NV:** Complete Shower Package w/Ramp, No Valve
- ☐ **HSC-143-SPC:** Complete Shower Package w/Ramp, Solid Phenolic Walls
- ☐ **HSC-143-SS-LS:** Complete Shower Package w/Ramp, SS Walls, Left, Shower Valve
- ☐ **HSC-143-SS-RS:** Complete Shower Package w/Ramp, SS Walls, Right, Shower Valve
- ☐ **HSC-143-WLS:** Wall Package, White Powder Coat
- ☐ **HSC-143-WLS-HDP:** Wall Package, High Density Polymer (White)
- ☐ **HSC-143-WLS-SPC:** Wall Package, Solid Phenolic Core
- ☐ **HSC-143-WLS-SS:** Wall Package, Stainless Steel

Optional Components:

- ☐ **SC-6:** Filler strip - Front
- ☐ **SC-7:** Filler strip - Back
- ☐ **HSC-TC-143:** Top cover only
- ☐ **HSC-TCLF-400:** Top cover with Light
- ☐ **SC-140-TCVH:** Thermostatic valve
- ☐ **Valve By Others**

FINISHES KEY FOR WALL PACKAGES (-WLS):

Powder Coat on Galvanized Steel (standard)

SS: Stainless steel

SPC: Solid phenolic core *


HDP: High density polymer*

DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

HSC-143 40x40x82" Transfer Style

HSC-143



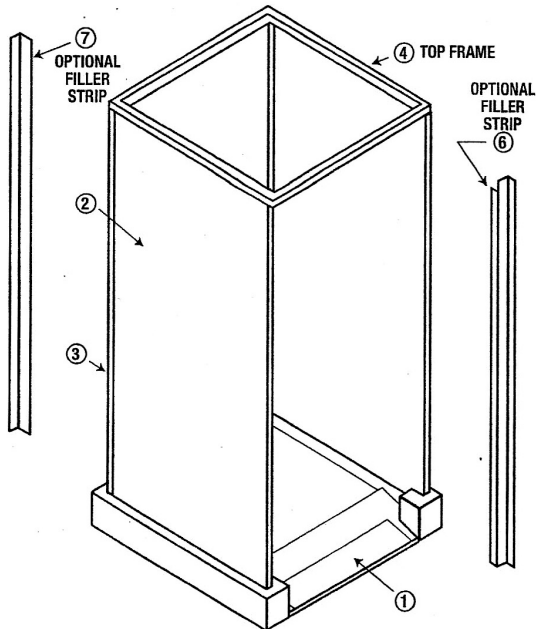


STANDARD EQUIPMENT FOR FIELD INSTALLATION

KEY NO.	QTY.	DESCRIPTION
1	1	40" X 40" BASE
2	3	36-9/16" X 77-3/16" PANEL
3	2	CORNER JOINT
4	1	TOP FRAME
—	1	ROD AND CURTAIN
—	1	PRESSURE BALANCED VALVE WITH STOPS
—	1	HAND HELD SHOWER HEAD WITH SWIVEL CONNECTOR, SUPPLY ELL, VACUUM BREAKER AND 69" C.P. FLEXIBLE BRASS HOSE
—	1	24" C.P. BRASS SLIDE BAR WITH ADJUSTABLE SHOWER HEAD MOUNTING BRACKET AND MOUNTING SCREWS.
—	1	HORIZONTAL WRAP AROUND STAINLESS STEEL GRAB BAR
—	1	VERTICAL STAINLESS STEEL GRAB BAR
—	1	RETRACTABLE HANDICAPPED SHOWER SEAT WITH STAINLESS STEEL FRAME

FOR CORRECT INSTALLATION:

1. ESTABLISH PROPER CLEARANCE BETWEEN SHOWER BASE AND WALLS.
2. SET SHOWER BASE ON MORTAR BED AND CAREFULLY LEVEL TO AVOID PROBLEMS OF UNEVEN SUB FLOOR.

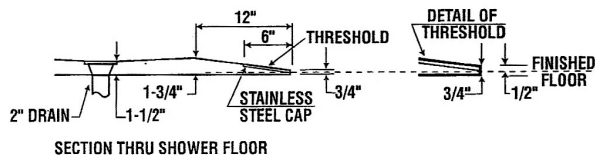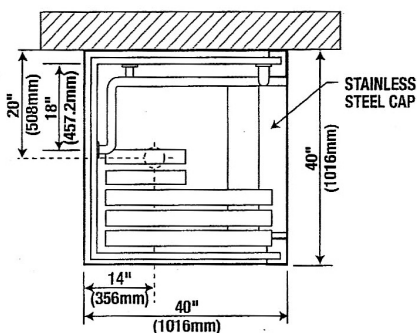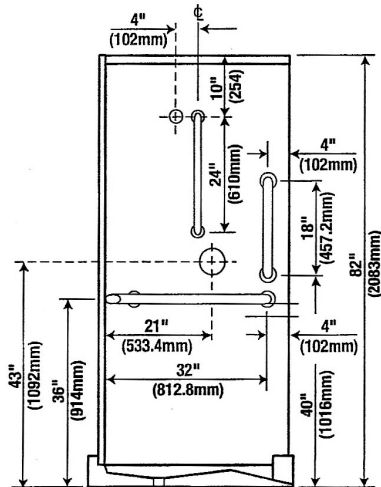

Note:

1. This style floor was designed to be set 1/4\"
2. It is recommend that a floor drain at or near the entrance be included.
3. Collapsible water dam available (-RDM)