

# WDA-3605, WDA-3630, WDA-3660 PENTELIC TRANSFER TYPE SHOWER FLOORS

Pentelic Transfer Type Shower Floor with Ramp. Terrazzo’s natural non-slip surface provides better footing and increased safety. Wheelchair shower floors are flanged on three sides for a water tight joint between the wall and shower floor. These shower floors must be set on a level grout or mortar bed.

The intent is to allow a wheelchair patient to lift one’s self onto a transfer seat with the assistance of a grab bar. This transfer type shower floor has an integral cast 12” ramp with a running slope of 1:12. A stainless steel cap covers and protects the leading 6” of the ramp. A floor drain by others at the entrance to the sloped threshold and a collapsible water dam (Option: -RDM) are recommended for added protection.



## ORDERING OPTIONS

Part Number

**WDA-**




(Shown above) Model WDA-3605

## DIMENSIONS

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

| MODEL    | FLANGES | RAMP   | SIZE  | A  | B  | C  | D  | E  | F  |
|----------|---------|--------|-------|----|----|----|----|----|----|
| WDA-3605 | 3 sides | 1 side | 40x38 | 40 | 38 | 12 | 20 | 26 | 12 |
| WDA-3630 | 3 sides | 1 side | 64x32 | 64 | 32 | 12 | 32 | 20 | 12 |
| WDA-3660 | 3 sides | 1 side | 64x38 | 64 | 38 | 12 | 32 | 26 | 12 |

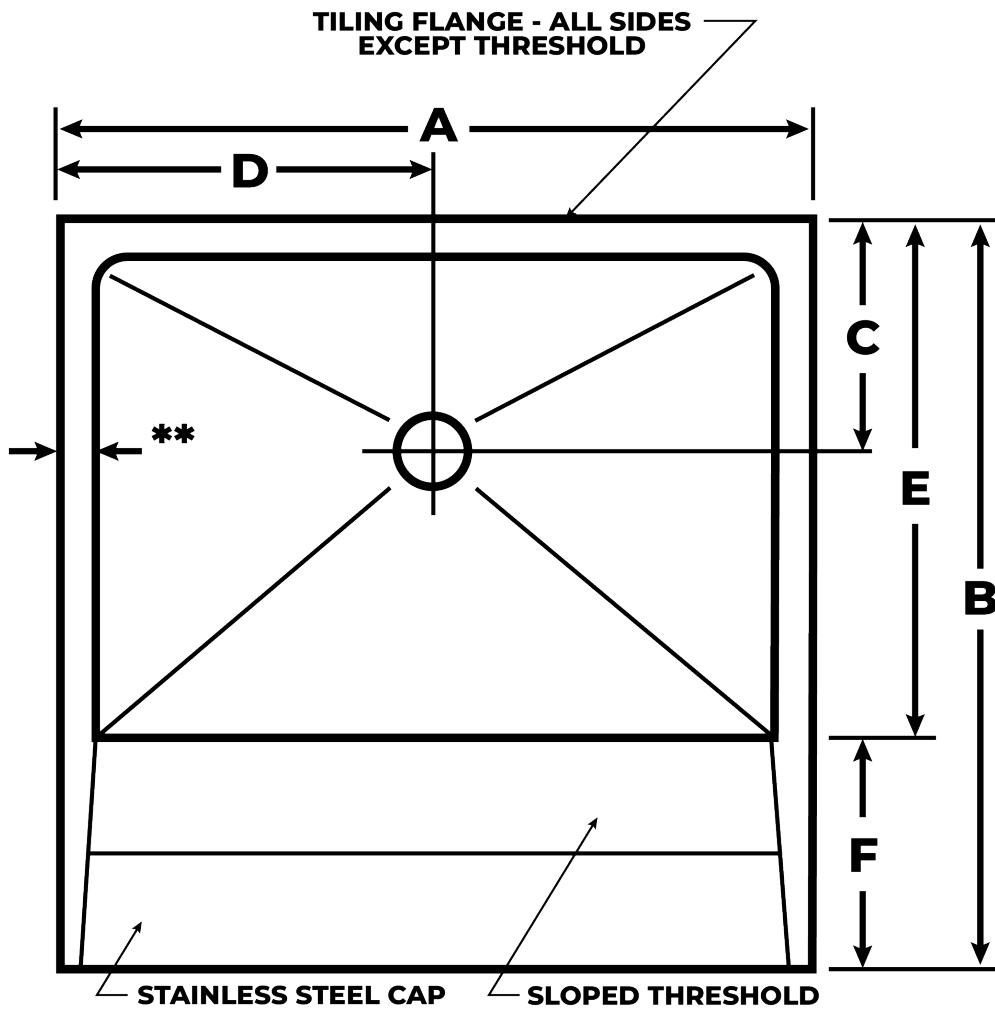

### PLAN

"WDA" SERIES W/ 1½" CURB\*\*