

SS-2424 Stainless Steel Mop Sink

The Stainless Steel mop basin provides ample space for all your mop cleaning needs. Despite its spacious size, it only weighs 50 lbs, making it lightweight and easy to handle during installation by just one person. The brushed finish not only gives it a professional look, but also helps to resist stains and corrosion. Incorporates unique sound deadening insulation on all enclosed sides to suppress noise during operation.

The included 2" brass compression drain with compression gasket eliminates the need for caulking, making installation even more convenient. The removable stainless-steel strainer adds an extra layer of convenience for maintenance.



FEATURES -

- 18 Gauge apron with 20 gauge well and a 304 SS #4 brushed finish
- Complies with ASME A112.19.3/ CSA B45.4
- Complies with NSF-2
- Sound deadening insulation on all sides
- Narrow walls for maximum volume capacity
- Lightweight design of 50 lbs for easy installation onto any floor
- 3-sided skirt with flanged top and bottom for added rigidity
- Seamless bowl with rounded corners for easy cleaning
- Can hang mop wringer on side
- Wall mounted bracket to secure mop sink to wall is included
- Centered 2" drain location with 2" IPS Outlet
- 2" Brass compression drain included
- Removable stainless-steel strainer

OPTIONAL COMPONENTS


☐ BP: Back Panels - 24"
☐ T-10-VB: Mop Sink Faucet - Rough Chrome
☐ T-15-VB: Mop Sink Faucet - Polished Chrome
☐ T-35: 30" Hose and Wall Bracket
☐ T-40: Stainless Steel Mop Hanger
☐ S436-0008: Compression Gasket, 2" Drain, For SV and NHCl Pipe
☐ S436-0009: Replacement Compression Gasket, 2" Drain, For PVC Pipe

Pricing for optional components can be found at sternwilliams.com/pricing/



ORDERING OPTIONS







DIMENSIONS

☐ **2424:** 24x24"

All dimensions subject to manufacturing variance of plus or minus 1/4" (6 mm)

MODEL	SIZE	Α	В	С
SS-2424	24x24x13-1/4	24	24	12

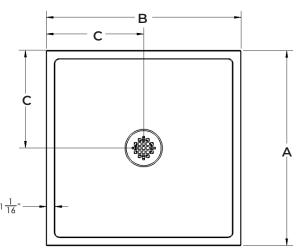

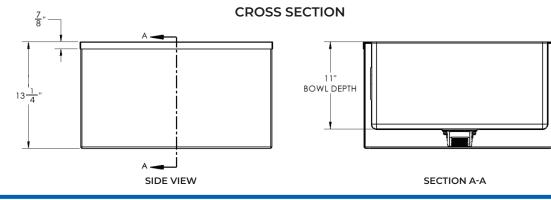

SPECS

Furnish and install Stainless Steel mop service basin (mop sink) manufactured by Stern Williams, using #4 brushed finish to resist stains and corrosion. Mop service basin shall meet requirements ASME A112.19.3/CSA B45.4 and NSF-2. Mop service basin shall have a 3-sided skirt with flanged top and bottom for added rigidity and shall include sound insulating polyurethane foam sealant on all enclosed sides of the sink. To help secure mop sink to the wall, the SS-2424 shall include a wall mounted bracket. Mop service basins include a 2" brass compression drain, compression gasket, and a removable stainless steel strainer.